


GF Malleable Fittings cap 300 1 1/2 G

1154198

- Cap, ISO/EN T1
- 'ST' these types of fittings are made from steel (galvanised finish = electroplated)
- Not suitable for drinking water installations.

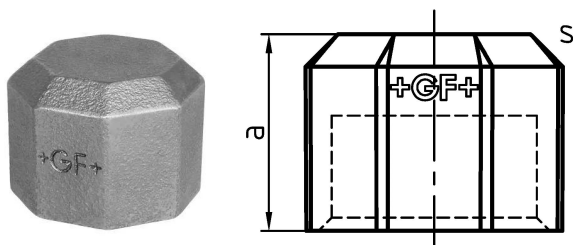

About GF Malleable Fittings cap 300

Specification

- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

GF Malleable Fittings cap 300 1 1/2 G

1154198



Product code

Item no EAN	7611205430726
Item no GF	770300208
Item no GTIN	07611205430726
Item no LVI	0855201
Item no NOBB	60639217
Item no NRF	1366949
Item no RSK	1329150
Item no VVS	004300411

Dimensions

Item Unit Height	53
Item Unit Length	57
Item Unit Weight	0,226
Item Unit Width	34
Item_UOM	pce

Packaging

Packaging GTIN PL1	07611205230722
Packaging GTIN PL4	06414900241854
Packaging Height PL1	200
Packaging Height PL4	729
Packaging Length PL1	260
Packaging Length PL4	1200
Packaging Quantity PL1	50
Packaging Quantity PL4	2700
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00988
Packaging Volume PL4	0,69984

Packaging Weight PL1	11,514
Packaging Weight PL4	630,2
Packaging Width PL1	190
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb