


## GF Malleable Fittings cap 300 2 1/2 G

**1154200**

- Cap, ISO/EN T1
- 'ST' these types of fittings are made from steel (galvanised finish = electroplated)
- Not suitable for drinking water installations.

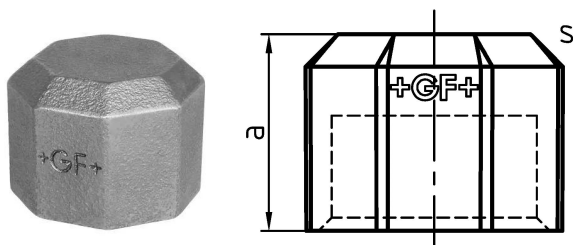

### About GF Malleable Fittings cap 300

#### Specification

- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

#### Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

## GF Malleable Fittings cap 300 2 1/2 G

1154200



### Product code

Item no EAN	7611205430771
Item no GF	770300210
Item no GTIN	07611205430771
Item no LVI	0855203
Item no NOBB	60639220
Item no NRF	1366952
Item no RSK	1329176
Item no VVS	004300413

### Dimensions

Item Unit Height	86
Item Unit Length	90
Item Unit Weight	0,728
Item Unit Width	44
Item_UOM	pce

### Packaging

Packaging GTIN PL1	07611205230777
Packaging GTIN PL4	06414900241830
Packaging Height PL1	200
Packaging Height PL4	729
Packaging Length PL1	260
Packaging Length PL4	1200
Packaging Quantity PL1	20
Packaging Quantity PL4	1080
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00988
Packaging Volume PL4	0,69984

Packaging Weight PL1	14,774
Packaging Weight PL4	806,24
Packaging Width PL1	190
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)