


GF Malleable Fittings backnut 310 1 1/4 G

1154244

- Backnut, ISO/EN P4
- 'ST' these types of fittings are made from steel (galvanised finish = electroplated).

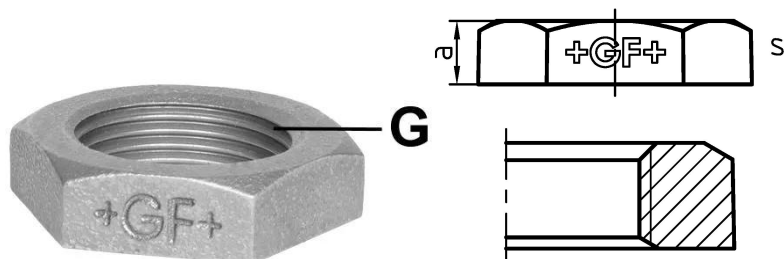

About GF Malleable Fittings backnut 310

Specification

- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

GF Malleable Fittings backnut 310 1 1/4 G

1154244



Status

Item Available From date

2025-09-05

Product code

Item no EAN	7611205431532
Item no GF	770310207
Item no GTIN	07611205431532
Item no LVI	0855207
Item no NOBB	60262105
Item no NRF	1030269
Item no RSK	1315618
Item no VVS	004310410

Dimensions

Item Unit Height	56
Item Unit Length	64
Item Unit Weight	0,126
Item Unit Width	13
Item_UOM	pce

Packaging

Packaging GTIN PL1	07611205231538
Packaging GTIN PL4	06414900241694
Packaging Height PL1	100
Packaging Height PL4	508
Packaging Length PL1	260
Packaging Length PL4	1200
Packaging Quantity PL1	50
Packaging Quantity PL4	3600
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,00494
Packaging Volume PL4	0,48768
Packaging Weight PL1	6,42
Packaging Weight PL4	473,6
Packaging Width PL1	190
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb