


GF Malleable Fittings 329 - screwed flange, drilled, 4 holes, black 1/2

1154289

- Screwed flange, drilled, 4 holes
- Diameter of pitch circle and sealing face compatible to EN 1092-2 and DIN 2566.
- * 4 holes

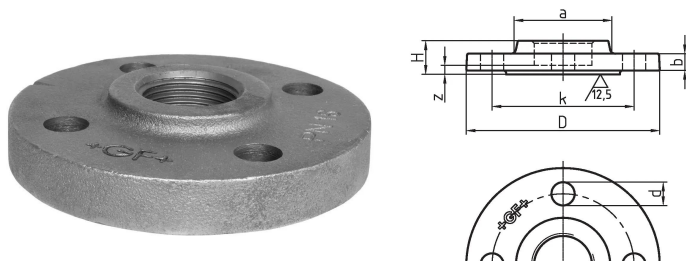

About GF Malleable Fittings 329 - screwed flange, drilled, 4 holes, black Specification


- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

GF Malleable Fittings 329 - screwed flange, drilled, 4 holes, black 1/2

1154289

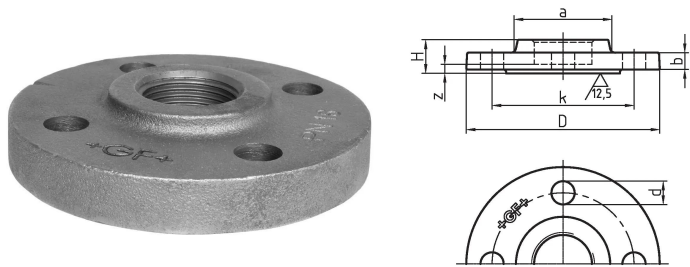

Status

Item Available From date

2025-09-05

Product code

Item no EAN	7611205334826
Item no GF	770329104
Item no GTIN	07611205334826
Item no RSK	1254101
Item no VVS	004328104

Dimensions

Item Unit Height	95
Item Unit Length	95
Item Unit Weight	0,616
Item Unit Width	20
Item_UOM	pce

Packaging

Packaging GTIN PL1	07611205134822
Packaging GTIN PL4	06414900120296
Packaging Height PL1	100
Packaging Height PL4	508
Packaging Length PL1	260
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL4	720
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00494
Packaging Volume PL4	0,48768
Packaging Weight PL1	6,28

Packaging Weight PL4	463,52
Packaging Width PL1	190
Packaging Width PL4	800
Measurements	
Z Measurement a	35
Z Measurement a	35
Z Measurement b	14
Z Measurement d	95
Z Measurement H	20
Z Measurement k	65
Z	7

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E
customerservice.uk.bfs@georgfi
scher.com