


## GF Malleable Fittings 340 - union taper seat, black 1/8

**1154380**

- Union taper seat, ISO/EN U11
- Torque and notes for installation please find in "Technical Product Notes".
- 374 G ... refers to the thread size G according to ISO 228 of the union nut 374.
- \* Inside hexagon
- \*\* Version

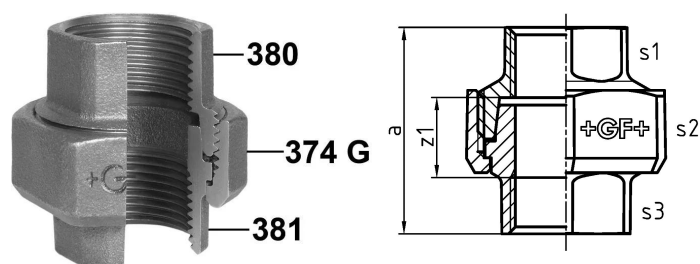

### About GF Malleable Fittings 340 - union taper seat, black

#### Specification

- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

#### Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

## GF Malleable Fittings 340 - union taper seat, black 1/8

1154380



### Product code

Item no EAN	7611205338077
Item no GF	770340101
Item no GTIN	07611205338077
Item no RSK	1260871
Item no VVS	004340101

### Dimensions

Item Unit Height	26
Item Unit Length	29
Item Unit Weight	0,0684
Item Unit Width	38
Item_UOM	pce

### Packaging

Packaging GTIN PL1	07611205138073
Packaging GTIN PL4	06414900119856
Packaging Height PL1	100
Packaging Height PL4	508
Packaging Length PL1	260
Packaging Length PL4	1200
Packaging Quantity PL1	80
Packaging Quantity PL4	5760
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00494
Packaging Volume PL4	0,48768
Packaging Weight PL1	5,592
Packaging Weight PL4	413,984
Packaging Width PL1	190

Packaging Width PL4	800
---------------------	-----

## Measurements

Wall thickness_s1	15
-------------------	----

Wall thickness_s2	26
-------------------	----

Wall thickness s3	15
-------------------	----

Z Measurement a	38
-----------------	----

Z Measurement a	38
-----------------	----

Z Measurement d	1/8
-----------------	-----

z1	24
----	----

## Technical documents

[Download documents here](#)

### Uponor UK

Blackmor Lane The Pavillion  
WD18 8GA, Watford  
UK

T +44 (0)1923 381212  
E  
customerservice.uk.bfs@georgfi  
scher.com