


GF Malleable Fittings 340 - union taper seat, galvanized 1/8

1154393

- Union taper seat, ISO/EN U11
- Torque and notes for installation please find in "Technical Product Notes".
- 374 G ... refers to the thread size G according to ISO 228 of the union nut 374.
- * Inside hexagon
- ** Version

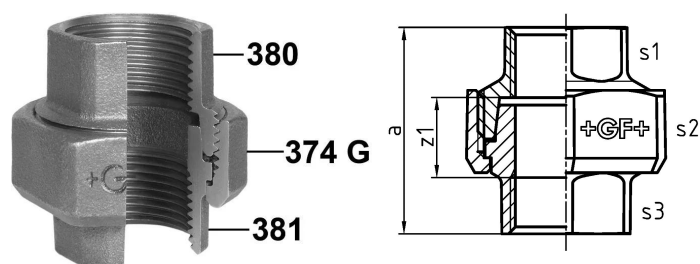

About GF Malleable Fittings 340 - union taper seat, galvanized

Specification

- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

GF Malleable Fittings 340 - union taper seat, galvanized 1/8

1154393



Status

Item Available From date

2025-09-05

Product code

Item no EAN	7611205438074
Item no GF	770340201
Item no GTIN	07611205438074
Item no RSK	1260872
Item no VVS	004340401

Dimensions

Item Unit Height	26
Item Unit Length	29
Item Unit Weight	0,0702
Item Unit Width	38
Item_UOM	pce

Packaging

Packaging GTIN PL1	07611205238070
Packaging GTIN PL4	06414900240918
Packaging Height PL1	100
Packaging Height PL4	508
Packaging Length PL1	260
Packaging Length PL4	1200
Packaging Quantity PL1	80
Packaging Quantity PL4	5760
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00494
Packaging Volume PL4	0,48768
Packaging Weight PL1	5,736

Packaging Weight PL4	424,352
Packaging Width PL1	190
Packaging Width PL4	800

Measurements

Wall thickness_s1	15
Wall thickness_s2	26
Wall thickness s3	15
Z Measurement a	38
Z Measurement a	38
Z Measurement d	1/8
z1	24

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E
customerservice.uk.bfs@georgfi
scher.com