


## GF Malleable Fittings 344 - union taper seat, black 3/4

**1154457**

- Union taper seat
- Torque and notes for installation please find in "Technical Product Notes".
- 374 G ... refers to the thread size G according to ISO 228 of the union nut 374.

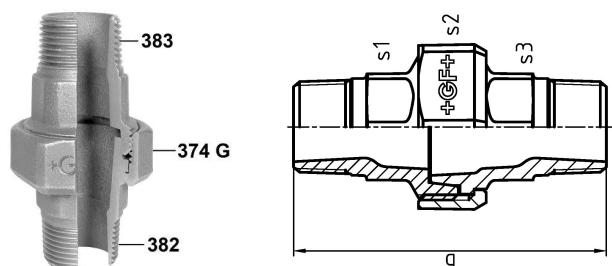

### About GF Malleable Fittings 344 - union taper seat, black

#### Specification

- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

#### Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

## GF Malleable Fittings 344 - union taper seat, black 3/4

1154457



### Product code

Item no EAN	7611205339463
Item no GF	770344105
Item no GTIN	07611205339463
Item no RSK	1260910
Item no VVS	004344106

### Dimensions

Item Unit Height	48
Item Unit Length	53
Item Unit Weight	0,363
Item Unit Width	93
Item_UOM	pce

### Packaging

Packaging GTIN PL1	07611205139469
Packaging GTIN PL4	06414900119467
Packaging Height PL1	200
Packaging Height PL4	534
Packaging Length PL1	260
Packaging Length PL4	1200
Packaging Quantity PL1	40
Packaging Quantity PL4	1440
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00988
Packaging Volume PL4	0,51264
Packaging Weight PL1	14,734
Packaging Weight PL4	542,72
Packaging Width PL1	190

Packaging Width PL4	800
---------------------	-----

## Measurements

Wall thickness_s1	32
-------------------	----

Wall thickness_s2	48
-------------------	----

Wall thickness s3	30
-------------------	----

Z Measurement b	93
-----------------	----

Z Measurement d	3/4
-----------------	-----

## Technical documents

[Download documents here](#)

### Uponor UK

Blackmor Lane The Pavillion  
WD18 8GA, Watford  
UK

T +44 (0)1923 381212

E  
customerservice.uk.bfs@georgfi  
scher.com