


## GF Malleable Fittings union 2x CuSn seat 342a 1 1/4 G

**1154479**

- Union, spherical seat/taper seat Bronze to Bronze, ISO/ENU11
- Torque and notes for installation please find in "Technical Product Notes".
- Not suitable for drinking water installation!
- '374 G' refers to the thread size 'G' according to ISO 228 of the union nut 374

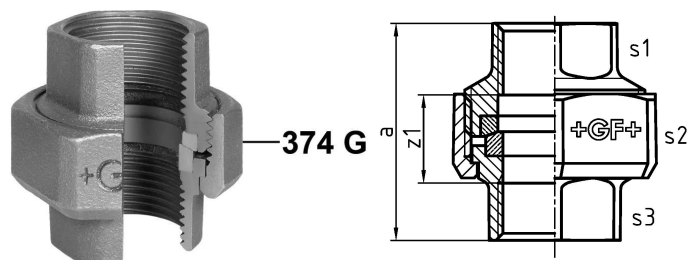

### About GF Malleable Fittings union 2x CuSn seat 342a

#### Specification


- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

#### Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

## GF Malleable Fittings union 2x CuSn seat 342a 1 1/4 G

1154479

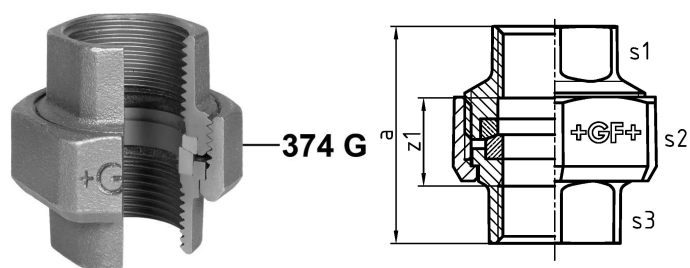

### Product code

Item no EAN	7611205439200
Item no GF	770345207
Item no GTIN	07611205439200
Item no RSK	1260899

### Dimensions

Item Unit Height	67
Item Unit Length	74
Item Unit Weight	0,5925
Item Unit Width	65
Item_UOM	pce

### Packaging

Packaging GTIN PL1	07611205239206
Packaging GTIN PL4	06414900240581
Packaging Height PL1	200
Packaging Height PL4	729
Packaging Length PL1	260
Packaging Length PL4	1200
Packaging Quantity PL1	20
Packaging Quantity PL4	1080
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00988
Packaging Volume PL4	0,69984
Packaging Weight PL1	12,064
Packaging Weight PL4	659,9
Packaging Width PL1	190
Packaging Width PL4	800

## Measurements

Wall thickness_s1	48
Wall thickness_s2	67
Wall thickness s3	48
z1	27

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)