


GF Malleable Fittings union angular deviator 346 max. 6deg 1/2 G

1154488

- Union, spherical seat angular deviation max. 6°, ISO/EN U11
- Torque and notes for installation please find in "Technical Product Notes".
- '374 G' refers to the thread size 'G' according to ISO 228 of the union nut 374.

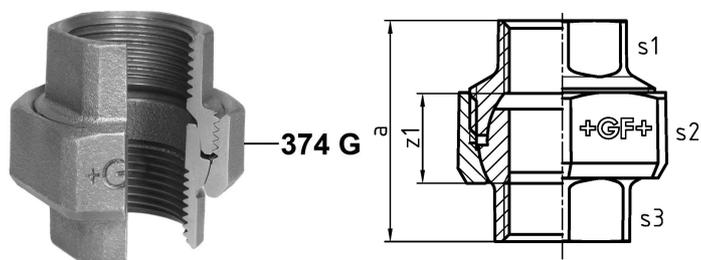

About GF Malleable Fittings union angular deviator 346 max. 6deg

Specification


- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

GF Malleable Fittings union angular deviator 346 max. 6deg 1/2 G

1154488

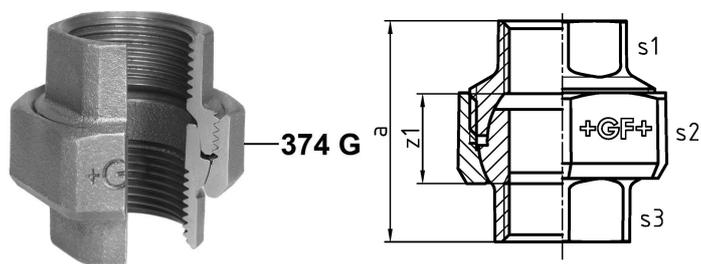

Status

Item Available From date

2025-09-05

Product code

Item no EAN 7611205440060

Item no GF 770346204

Item no GTIN 07611205440060

Item no RSK 1260922

Dimensions

Item Unit Height 44

Item Unit Length 48

Item Unit Weight 0,229

Item Unit Width 48

Item_UOM pce

Packaging

Packaging GTIN PL1 07611205240066

Packaging GTIN PL4 06414900240475

Packaging Height PL1 200

Packaging Height PL4 729

Packaging Length PL1 260

Packaging Length PL4 1200

Packaging Quantity PL1 70

Packaging Quantity PL4 3780

Packaging Type PL1 Base_Box

Packaging Type PL4 Pallet

Packaging Volume PL1 0,00988

Packaging Volume PL4 0,69984

Packaging Weight PL1 16,244

Packaging Weight PL4 885,62

Packaging Width PL1	190
Packaging Width PL4	800

Measurements

Wall thickness_s1	26
Wall thickness_s2	44
Wall thickness s3	26
z1	22

Technical documents

[Download documents here](#) 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb