


GF Malleable Fittings union angular deviator 346 max. 6deg 1 1/2 G

1154492

- Union, spherical seat angular deviation max. 6°, ISO/EN U11
- Torque and notes for installation please find in "Technical Product Notes".
- '374 G' refers to the thread size 'G' according to ISO 228 of the union nut 374.

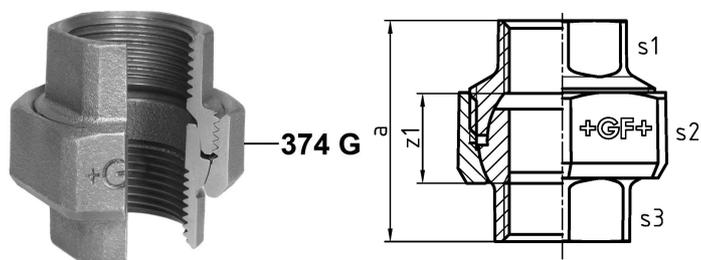

About GF Malleable Fittings union angular deviator 346 max. 6deg

Specification


- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

GF Malleable Fittings union angular deviator 346 max. 6deg 1 1/2 G

1154492

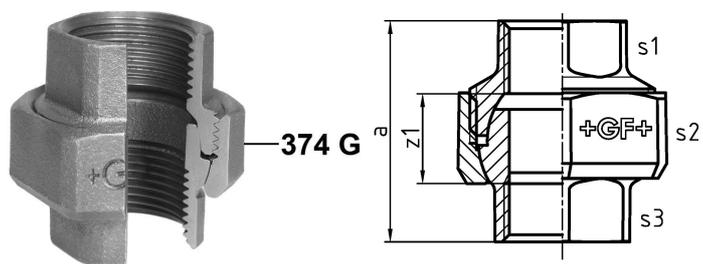

Status

Item Available From date

2025-09-05

Product code

Item no EAN	7611205440107
Item no GF	770346208
Item no GTIN	07611205440107
Item no RSK	1260931

Dimensions

Item Unit Height	74
Item Unit Length	81
Item Unit Weight	0,797
Item Unit Width	75
Item_UOM	pce

Packaging

Packaging GTIN PL1	07611205240103
Packaging GTIN PL4	06414900240437
Packaging Height PL1	200
Packaging Height PL4	729
Packaging Length PL1	260
Packaging Length PL4	1200
Packaging Quantity PL1	15
Packaging Quantity PL4	810
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00988
Packaging Volume PL4	0,69984
Packaging Weight PL1	12,169
Packaging Weight PL4	665,57

Packaging Width PL1	190
---------------------	-----

Packaging Width PL4	800
---------------------	-----

Measurements

Wall thickness_s1	54
-------------------	----

Wall thickness_s2	73
-------------------	----

Wall thickness s3	54
-------------------	----

z1	32
----	----

Technical documents

[Download documents here](#) 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb