


## GF Malleable Fittings longscrew 535 1 G

**1154774**

- Longscrew hexagon nipple, complete
- \* Large chamfer (gasket chamber)

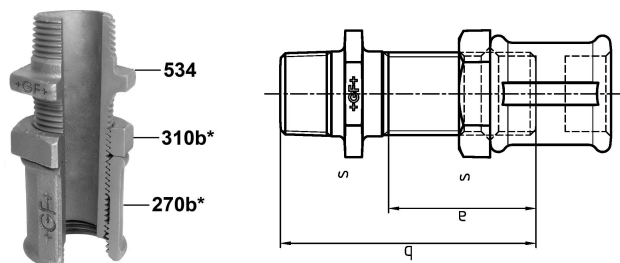

### About GF Malleable Fittings longscrew 535

#### Specification


- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

#### Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

## GF Malleable Fittings longscrew 535 1 G

1154774

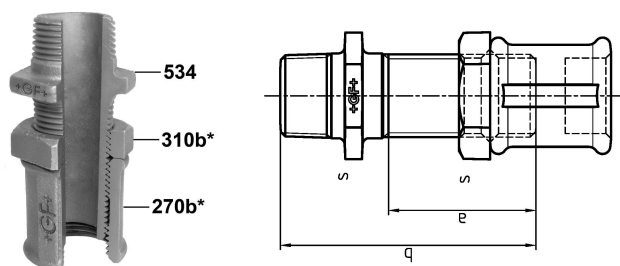

### Status

Item Available From date

2025-09-05

### Product code

Item no EAN	7611205456313
Item no GF	770535206
Item no GTIN	07611205456313
Item no RSK	1316358
Item no VVS	004535408

### Dimensions

Item Unit Height	46
Item Unit Length	54
Item Unit Weight	0,5498
Item Unit Width	92
Item_UOM	pce

### Packaging

Packaging GTIN PL1	07611205256319
Packaging GTIN PL4	06414900239073
Packaging Height PL1	200
Packaging Height PL4	729
Packaging Length PL1	260
Packaging Length PL4	1200
Packaging Quantity PL1	30
Packaging Quantity PL4	1620
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00988
Packaging Volume PL4	0,69984
Packaging Weight PL1	16,708

Packaging Weight PL4	910,676
Packaging Width PL1	190
Packaging Width PL4	800

## Measurements

Wall thickness_s	46
------------------	----

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)