


GF Primofit cap STL NBR 63 B

1156854

for steel pipes

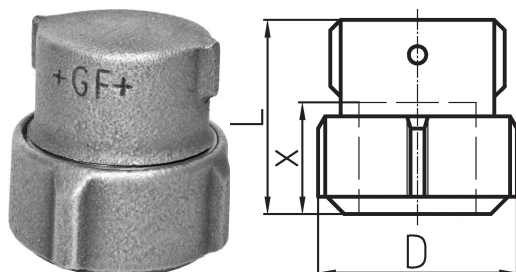

About GF Primofit cap STL NBR

Specification

- Manufactured from whiteheart malleable cast iron (EN-GJMW-400-5)
- Preassembled compression fittings – no disassembly required before installation
- Available in black, hot-dip galvanized, and male adapter in stainless steel
- Full end-load capability for secure and durable connections
- Angular deviation up to 3° per connection
- Threads in accordance to EN 10226-1

Application


- Suitable for BT (Building Technology), IS (Industrial Systems), and UT (Utility) applications
- Ideal for new installations, pipe repairs, extensions, and valve or filter replacements
- Compatible with steel, PE, lead, and special steel pipes

Certification

- Conforms to EN 10242 and EN 10226-1 standards

GF Primofit cap STL NBR 63 B

1156854

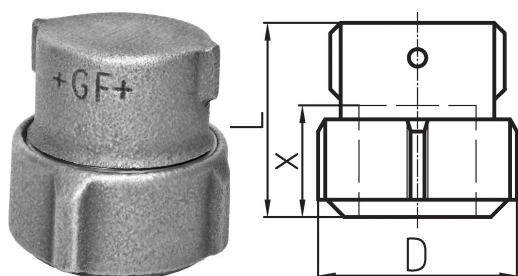

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb