


## GF JRGURED pressure reducing valve 1330 6 bar DN25

**1157299**

- Description: pressure gauge connection on both sides, gunmetal filter cup, with unions
- Temperature: max. 70°C
- Nominal pressure: PN25
- Material: gunmetal, stainless steel, EPDM, plastic
- Factory setting: 600 kPa (6 bar), adjustable on site 600 - 1000 kPa (6 - 10 bar)
- Connection: male thread

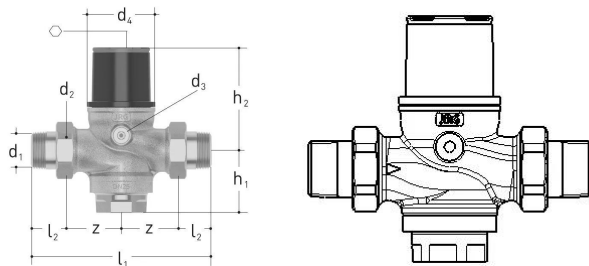

### About GF JRGURED pressure reducing valve 1330 6 bar

#### Specification

- Dimension range DN15 – DN100
- Three different pressure ranges (0.5 – 2bar, 2 – 6bar, and 6 – 10 bar) with factory settings (e.g. 2, 4 and 6 bar)

#### Application

- House water inlet
- Potable water and oil-free compressed air
- Inlet modulation for machines and appliances

## GF JRGURED pressure reducing valve 1330 6 bar DN25

1157299



### Measurements

Cylindric thread G2	1 1/4
Female thread Rp3	1/4
Length (l1)	167
Length (l2)	34
MALE THREAD R1	1
Z Measurement d	25
Z Measurement d4	60
Z Measurement h1	55
Z Measurement h2	90
Z	50

### Status

Item Available From date 2025-07-17

### Product code

Item no EAN	7613263116406
Item no GF	350740361
Item no GTIN	07613263116406

### Dimensions

Item Unit Height	145
Item Unit Length	167
Item Unit Weight	1,8
Item Unit Width	70
Item_UOM	pce

### Packaging

Packaging GTIN PL1	07613263116406
Packaging Height PL1	80
Packaging Length PL1	205
Packaging Quantity PL1	1

Packaging Type PL1	Base_Box
Packaging Volume PL1	0,001804
Packaging Weight PL1	1,9
Packaging Width PL1	110

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavillion  
WD18 8GA, Watford  
UK

T +44 (0)1923 381212

E

customerservice.uk.bfs@georgfi  
scher.com