


## GF JRGURED pressure reducing valve 1303 4bar DN32

**1157300**

- Description: pressure gauge connection on both sides, plastic filter cup, without unions
- Temperature: max. 30°C
- Nominal pressure: PN25
- Material: gunmetal, stainless steel, EPDM, plastic
- Factory setting: 400 kPa (4 bar), adjustable on site 200 - 600 kPa (2 - 6 bar)
- Connection: screw connection

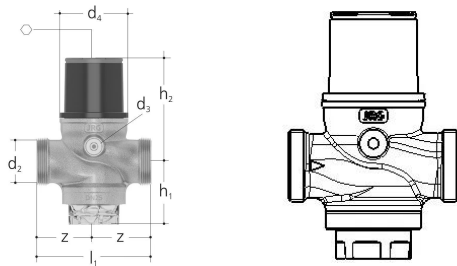

### About GF JRGURED pressure reducing valve 1303 4bar

#### Specification



- Dimension range DN15 – DN100
- Three different pressure ranges (0.5 – 2bar, 2 – 6bar, and 6 – 10 bar) with factory settings (e.g. 2, 4 and 6 bar)

#### Application

- House water inlet
- Potable water and oil-free compressed air
- Inlet modulation for machines and appliances

## GF JRGURED pressure reducing valve 1303 4bar DN32

1157300



### Product code

Item no EAN	7613263116253
Item no GF	350740401
Item no GTIN	07613263116253

### Dimensions

Item Unit Height	176
Item Unit Length	123
Item Unit Weight	1,8
Item Unit Width	79
Item_UOM	pce

### Measurements

Length (l1)	120
Z Measurement h1	67
Z Measurement h2	109
Z	60

### Packaging

Packaging GTIN PL1	07613263116253
Packaging Height PL1	91
Packaging Length PL1	250
Packaging Quantity PL1	1
Packaging Type PL1	Base_Box
Packaging Volume PL1	0,0028665
Packaging Weight PL1	1,88
Packaging Width PL1	126

### Technical documents

Download documents here

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)