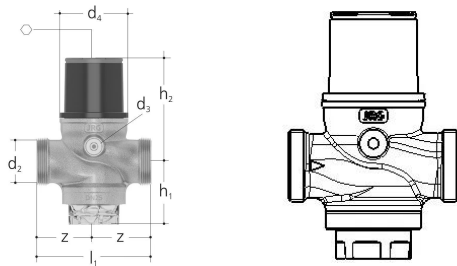


GF JRGURED pressure reducing valve 1303 4 bar DN32**1157300**

- Description: pressure gauge connection on both sides, plastic filter cup, without unions
- Temperature: max. 30°C
- Nominal pressure: PN25
- Material: gunmetal, stainless steel, EPDM, plastic
- Factory setting: 400 kPa (4 bar), adjustable on site 200 - 600 kPa (2 - 6 bar)
- Connection: screw connection

**About GF JRGURED pressure reducing valve 1303 4 bar****Specification**

- Dimension range DN15 – DN100
- Three different pressure ranges (0.5 – 2bar, 2 – 6bar, and 6 – 10 bar) with factory settings (e.g. 2, 4 and 6 bar)

Application

- House water inlet
- Potable water and oil-free compressed air
- Inlet modulation for machines and appliances

GF JRGURED pressure reducing valve 1303 4 bar DN32

1157300



Measurements

Cylindric thread G2	1 1/2
Female thread Rp3	1/4
Length (l1)	120
Z Measurement d	32
Z Measurement d4	72
Z Measurement h1	67
Z Measurement h2	109
Z	60

Product code

Item no EAN	7613263116253
Item no GF	350740401
Item no GTIN	07613263116253

Dimensions

Item Unit Height	176
Item Unit Length	123
Item Unit Weight	1,8
Item Unit Width	79
Item_UOM	pce

Packaging

Packaging GTIN PL1	07613263116253
Packaging Height PL1	91
Packaging Length PL1	250
Packaging Quantity PL1	1
Packaging Type PL1	Base_Box
Packaging Volume PL1	0,0028665
Packaging Weight PL1	1,88
Packaging Width PL1	126

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212

E
customerservice.uk.bfs@georgfi
scher.com