


GF JRGURED pressure reducing valve 1330 6 bar DN65

1157319

- Description: pressure gauge connection on both sides, gunmetal filter cup, with unions
- Temperature: max. 70°C
- Nominal pressure: PN25
- Material: gunmetal, stainless steel, EPDM, plastic
- Factory setting: 600 kPa (6 bar), adjustable on site 600 - 1000 kPa (6 - 10 bar)
- Connection: male thread

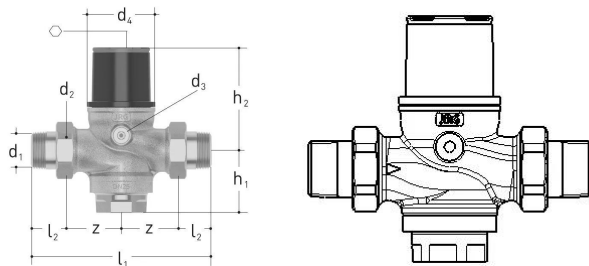

About GF JRGURED pressure reducing valve 1330 6 bar

Specification

- Dimension range DN15 – DN100
- Three different pressure ranges (0.5 – 2bar, 2 – 6bar, and 6 – 10 bar) with factory settings (e.g. 2, 4 and 6 bar)

Application

- House water inlet
- Potable water and oil-free compressed air
- Inlet modulation for machines and appliances

GF JRGURED pressure reducing valve 1330 6 bar DN65

1157319



Measurements

Cylindric thread G2	3
Female thread Rp3	1/4
Length (l1)	292
Length (l2)	56
MALE THREAD R1	2 1/2
Z Measurement d	65
Z Measurement d4	96
Z Measurement h1	98
Z Measurement h2	151
Z	90

Status

Item Available From date 2026-06-01

Product code

Item no EAN	6414900452878
Item no GF	350740761
Item no GTIN	06414900452878

Dimensions

Item Unit Height	249
Item Unit Length	292
Item Unit Weight	8,018
Item Unit Width	106
Item_UOM	pce

Packaging

Packaging GTIN PL1	07613263115935
Packaging Height PL1	113
Packaging Length PL1	365
Packaging Quantity PL1	1

Packaging Type PL1	Base_Box
Packaging Volume PL1	0,008249
Packaging Weight PL1	8,238
Packaging Width PL1	200

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212

E
customerservice.uk.bfs@georgfi
scher.com