
Product data sheet



GF JRG Sanipex inlay MT 26-1/2

1158814

- threaded connection insert
- brass construction
- enables integration with threaded fittings
- suitable for plumbing installations

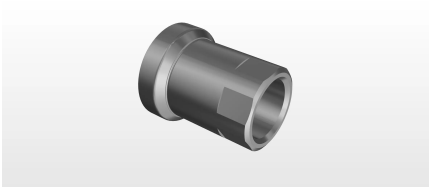

About GF JRG Sanipex inlay MT

Specification

- The pipe-in-pipe technology enables the pipes to be installed directly into the concrete.
- The water-carrying inner pipe of dimensions d12 and d16: If it has been installed in the protective conduit, inner pipe can be replaced without prising open the floor coverings and wall plates if damaged.

Application


- Cold and hot water, HVAC, compressed air and greywater installations
- Flush-mounted pipes from distributors to the location of the taps in pipe-in-pipe technology

Certification

- 3,1
- SVGW
- KIWA
- ÖVGW

GF JRG Sanipex inlay MT 26-1/2

1158814

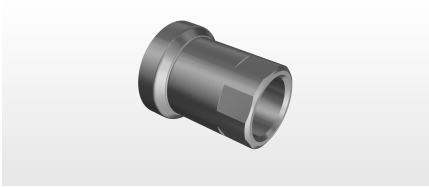

Product code

Item no EAN	7613263089076
Item no GF	358300050
Item no GTIN	07613263089076

Dimensions

Item Unit Height	32
Item Unit Length	39
Item Unit Weight	0,06
Item Unit Width	32
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414900068079
Packaging Height PL1	178
Packaging Length PL1	242
Packaging Quantity PL1	100
Packaging Type PL1	Base_Box
Packaging Volume PL1	0,0075383
Packaging Weight PL1	6,125
Packaging Width PL1	175

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+