


**Uponor Uni Pipe PLUS white insulated S10 WLS 035 14x2,0 blue 75m****1160885**

- Coil
- Insulation thickness 10 mm
- Thermal conductivity  $\lambda=0,035$  W/m\*k
- Round extruded
- Fire Class E to BS EN 13501-1

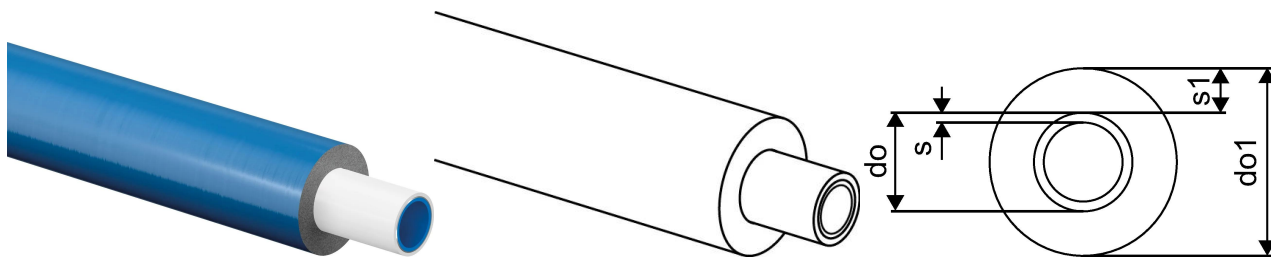

## About Uponor Uni Pipe PLUS white insulated S10 WLS 035

### Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)

- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

### Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor Uni Pipe PLUS white insulated S10 WLS 035 14x2,0 blue 75m

1160885

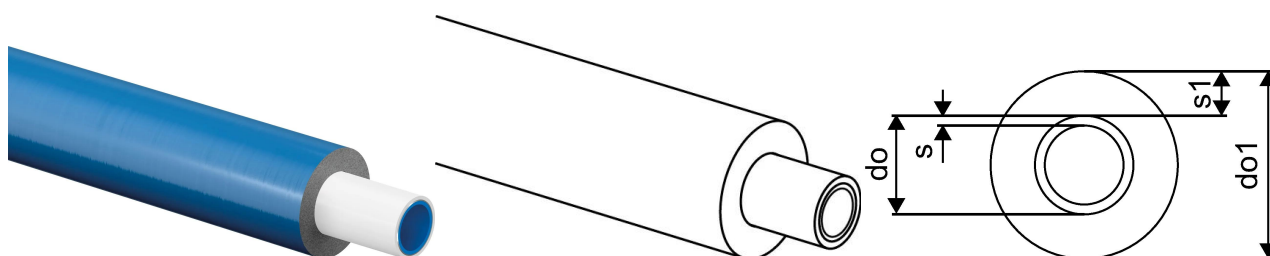

### Status

Item Available From date

2025-01-02

### Product code

Item no EAN 6414900507752

Item no GTIN 06414900507752

### Dimensions

Item Unit Height 34

Item Unit Length 1000

Item Unit Weight 0,14637

Item Unit Width 34

Item\_UOM m

### Measurements

Outer Diameter\_do 14

Outer Diameter\_do1 34

Wall thickness\_s 2

Wall thickness\_s1 10

### Packaging

Packaging GTIN PL1 06414900509046

Packaging GTIN PL4 06414900509053

Packaging Height PL1 390

Packaging Height PL4 2000

Packaging Length PL1 780

Packaging Length PL4 1200

Packaging Quantity PL1 75

Packaging Quantity PL4 450

Packaging Type PL1 Base\_Box

Packaging Type PL4 Pallet

Packaging Volume PL1 0,237276

Packaging Volume PL4	1,92
Packaging Weight PL1	13,32746214
Packaging Weight PL4	104,964772
Packaging Width PL1	780
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)