
Product data sheet



GF Uponor Uni Pipe PLUS white insulated S10 WLS 035 14x2,0 blue 75m

1160885

- Coil
- Insulation thickness 10 mm
- Thermal conductivity λ=0,035 W/m*k
- Round extruded
- Fire Class E to BS EN 13501-1

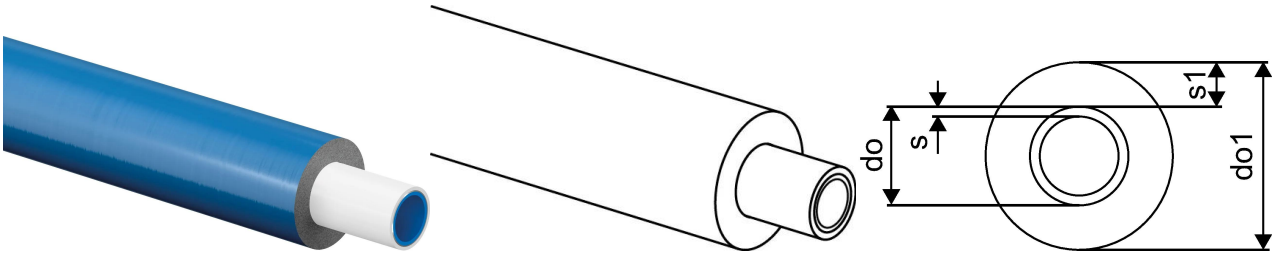

About GF Uponor Uni Pipe PLUS white insulated S10 WLS 035

Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)
- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

UK Reg4 approval
- WRAS or
- KIWA
To meet the requirements of the
Water Supply (Water Fittings) Regulations 1999

GF Uponor Uni Pipe PLUS white insulated S10 WLS 035 14x2,0 blue 75m

1160885

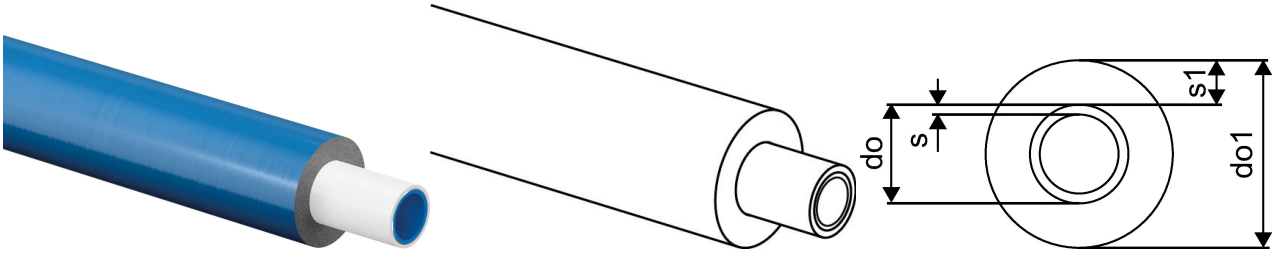

Status

Item Available From date	2025-01-02

Product code

Item no EAN	6414900507752
Item no GTIN	06414900507752

Dimensions

Item Unit Height	34
Item Unit Length	1000
Item Unit Weight	0,14637
Item Unit Width	34
Item_UOM	m

Measurements

Outer Diameter_do	14
Outer Diameter_do1	34
Wall thickness_s	2
Wall thickness_s1	10

Packaging

Packaging GTIN PL1	06414900509046
Packaging GTIN PL4	06414900509053
Packaging Height PL1	390
Packaging Height PL4	2000
Packaging Length PL1	780
Packaging Length PL4	1200
Packaging Quantity PL1	75
Packaging Quantity PL4	450
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,237276
Packaging Volume PL4	1,92
Packaging Weight PL1	13,32746214
Packaging Weight PL4	104,964772
Packaging Width PL1	780
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+