
Product data sheet



GF Uponor Siccus Panel Mini 1200x600x15

1161845

- EPS panel 1.200x600x15mm
- With full-face heat transfer layer of Aluminium
- With integrated pipe grooves c-c 100mm
- For use with Uponor Comfort Pipe Minitec 9,9

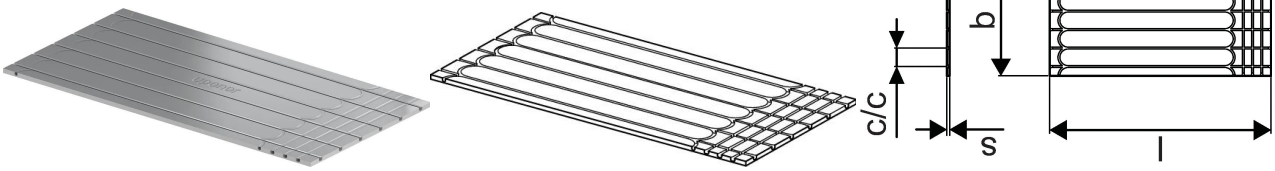

About GF Uponor Siccus Panel Mini

Specification

- Siccus Mini is a low-profile, dry installation UFH system
- Full-surface integrated, aluminium heat conducting layer according to BS EN 1264; design B

- For installation with Uponor Comfort PE-X Pipe 9.9mm

Application


- Radiant underfloor heating and cooling for dry-build installations
- Direct floor application

Certification

Certification Siccus mini
- DINCERTCO 7F531-F (floating laminate)
- DINCERTCO 7F532-F (direct flooring with wood parquet)
- DINCERTCO 7F533-F (direct flooring with ceramic tiles, natural stone)
- DINCERTCO 7F534-F (gypsum fiber layer for vinyl and carpet)

GF Uponor Siccus Panel Mini 1200x600x15

1161845

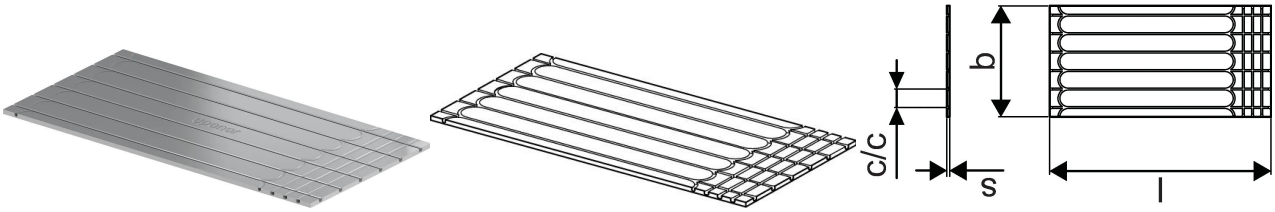

Status

Item Available From date	2026-03-01

Product code

Item no EAN	6414900331784
Item no GTIN	06414900331784

Dimensions

Item Unit Height	15
Item Unit Length	1200
Item Unit Weight	1,08
Item Unit Width	600
Item_UOM	m²

Packaging

Packaging GTIN PL1	06414900510745
Packaging GTIN PL4	06414900510820
Packaging Height PL1	168
Packaging Height PL4	1311
Packaging Length PL1	1210
Packaging Length PL4	1225
Packaging Quantity PL1	7.2
Packaging Quantity PL4	100.8
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,1240008
Packaging Volume PL4	2,0235285
Packaging Weight PL1	8,67
Packaging Weight PL4	146,38

Packaging Width PL1	610
Packaging Width PL4	1260

Measurements

Z Measurement b	600
Z Measurement h	15

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+