
Product data sheet



GF Uponor Siccus Panel 16 1200x600x20, 2,88M2

1161883

- Installation panel without heat transfer layer of Aluminium

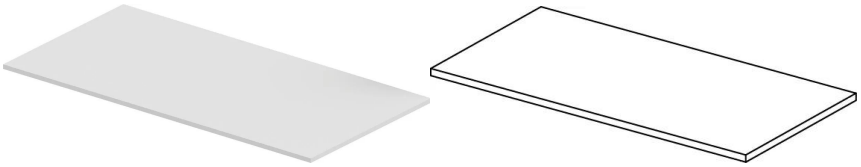

About GF Uponor Siccus Panel 16

Specification

- Siccus 16 underfloor heating panel system, consists of EPS (HBCD-free) boards acc. EN 13163 with Aluminium foil.
- Fire class E to BS EN 13501-1
- Application type acc. DIN 4108-10: DEO
- life load acc. EN 1991-1-1 = 2,0 kN/m²
- for installations with pipe c-c 150mm
- for pipe dim 16mm

Application


- Radiant underfloor heating and cooling
- For dry-build installations

Certification

- DIN CERTCO

GF Uponor Siccus Panel 16 1200x600x20, 2,88M2

1161883

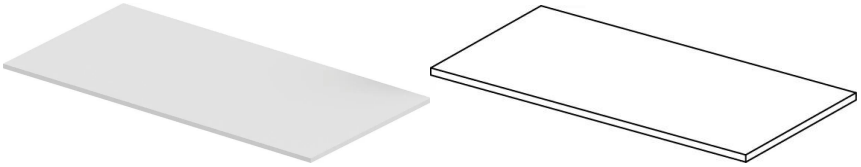

Product code

Item no EAN	6414900331920
Item no GTIN	06414900331920
Item no LVI	2022333
Item no RSK	2993184

Dimensions

Item Unit Height	80
Item Unit Length	1200
Item Unit Weight	3,27
Item Unit Width	600
Item_UOM	set

Packaging

Packaging GTIN PL1	06414900510806
Packaging GTIN PL4	06414900510875
Packaging Height PL1	94
Packaging Height PL4	1263
Packaging Length PL1	1210
Packaging Length PL4	1225
Packaging Quantity PL1	1
Packaging Quantity PL4	24
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0693814
Packaging Volume PL4	1,9494405
Packaging Weight PL1	4,02
Packaging Weight PL4	121,43
Packaging Width PL1	610
Packaging Width PL4	1260

Measurements

Z Measurement b	600
Z Measurement h	20

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+