


Uponor Siccus 16 Panel 1200x600x20mm, 7,2M2

1161884

- Installation with full-face heat transfer layer of Aluminium
- With integrated pipe grooves c-c 150mm
- EPS compressive strength: 400kPA

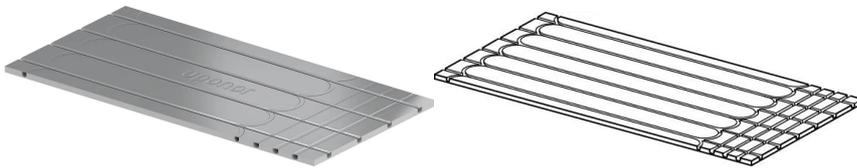

About Uponor Siccus 16 Panel

Specification

- Siccus 16 underfloor heating panel system, consists of EPS (HBCD-free) boards acc. EN 13163 with Aluminium foil.
- Fire class E to BS EN 13501-1
- Application type acc. DIN 4108-10: DEO
- life load acc. EN 1991-1-1 = 2,0 kN/m²
- for installations with pipe c-c 150mm
- for pipe dim 16mm

Application


- Radiant underfloor heating and cooling
- For dry-build installations

Certification

- DIN CERTCO

Uponor Siccus 16 Panel 1200x600x20mm, 7,2M2

1161884

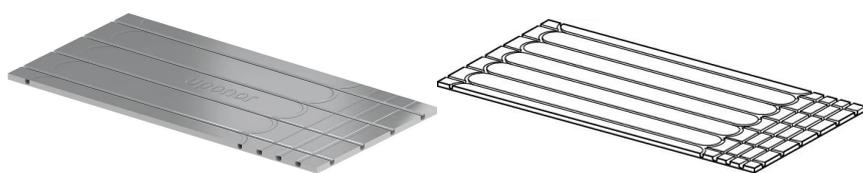

Product code

Item no EAN	6414900331937
Item no GTIN	06414900331937
Item no LVI	2022334
Item no RSK	2993183

Dimensions

Item Unit Height	200
Item Unit Length	1200
Item Unit Weight	8,30
Item Unit Width	600
Item_UOM	set

Packaging

Packaging GTIN PL1	06414900510813
Packaging GTIN PL4	06414900510882
Packaging Height PL1	222
Packaging Height PL4	1250
Packaging Length PL1	1221
Packaging Length PL4	1254
Packaging Quantity PL1	1
Packaging Quantity PL4	10
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,169955874
Packaging Volume PL4	1,9139175
Packaging Weight PL1	9,3
Packaging Weight PL4	117,97
Packaging Width PL1	627
Packaging Width PL4	1221

Measurements

Z Measurement b	600
-----------------	-----

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb