


## Uponor Siccus Panel 16 1200x600x20mm, 7,2M2

**1161884**

- Installation with full-face heat transfer layer of Aluminium
- With integrated pipe grooves c-c 150mm
- EPS compressive strength: 400kPA

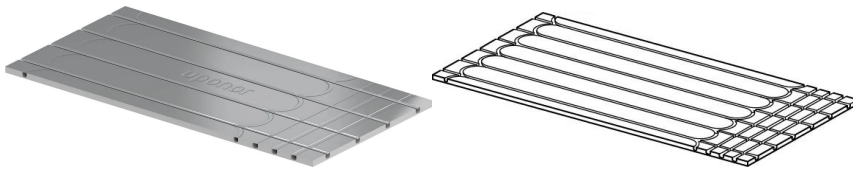

### About Uponor Siccus Panel 16

#### Specification

- Siccus 16 underfloor heating panel system, consists of EPS (HBCD-free) boards acc. EN 13163 with Aluminium foil.
- Fire class E to BS EN 13501-1
- Application type acc. DIN 4108-10: DEO
- life load acc. EN 1991-1-1 = 2,0 kN/m<sup>2</sup>
- for installations with pipe c-c 150mm
- for pipe dim 16mm

#### Application


- Radiant underfloor heating and cooling
- For dry-build installations

#### Certification

- DIN CERTCO

## Uponor Siccus Panel 16 1200x600x20mm, 7,2M2

1161884

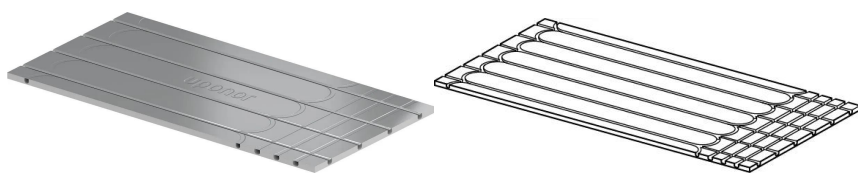

### Product code

Item no EAN	6414900331937
Item no GTIN	06414900331937
Item no LVI	2022334
Item no RSK	2993183

### Dimensions

Item Unit Height	200
Item Unit Length	1200
Item Unit Weight	8,30
Item Unit Width	600
Item_UOM	set

### Packaging

Packaging GTIN PL1	06414900510813
Packaging GTIN PL4	06414900510882
Packaging Height PL1	222
Packaging Height PL4	1250
Packaging Length PL1	1221
Packaging Length PL4	1254
Packaging Quantity PL1	1
Packaging Quantity PL4	10
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,169955874
Packaging Volume PL4	1,9139175
Packaging Weight PL1	9,3
Packaging Weight PL4	117,97
Packaging Width PL1	627
Packaging Width PL4	1221

### Measurements

Z Measurement b	600
-----------------	-----

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavillion  
WD18 8GA, Watford  
UK

T +44 (0)1923 381212

E  
customerservice.uk.bfs@georgfi  
scher.com