
Product data sheet



GF Uponor Vario compression adapter PEX 17x2,0-G3/4"FT Euro

1162321

- Eurocone
- Brass

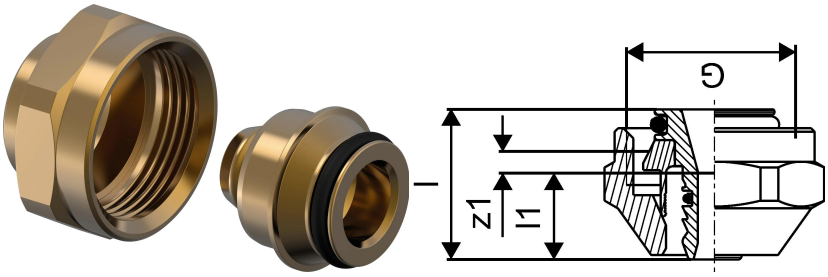

About GF Uponor Vario compression adapter PEX

Specification


- Components made of brass, nickel-plated brass, steel, and engineered plastics
- Eurocone, threaded, and flat-sealing connections
- Compatible with Vario B, C, S, M, PLUS, and MAGNA manifolds
- Includes valves, flowmeters, air vents, actuators, and adapters
- Designed for heating and cooling applications

Application

- To compliment/extend Vario manifold installations
- Flow regulation, balancing, and shut-off
- Connection of PEX, MLCP, and composite pipes
- Integration of actuators, sensors, and control units
- Commissioning, maintenance, and system optimization

GF Uponor Vario compression adapter PEX 17x2,0-G3/4"FT Euro

1162321

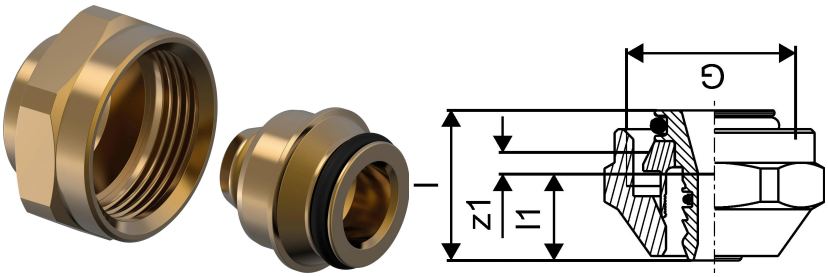

Measurements

Cylindric_thread_G	3/4
LENGTH_L	22,5
Length (l1)	12,9
Wall thickness_s	2,0
z1	3,2

Product code

Item no EAN	6414900394246
Item no GTIN	06414900394246

Dimensions

Item Unit Height	33
Item Unit Length	22.5
Item Unit Weight	0,054
Item Unit Width	33
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414900653633
Packaging GTIN PL3	06414900653657
Packaging Height PL1	27
Packaging Height PL3	89
Packaging Length PL1	30
Packaging Length PL3	176
Packaging Quantity PL1	1
Packaging Quantity PL3	25
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box

Packaging Volume PL1	0,0000243
Packaging Volume PL3	0,00211464
Packaging Weight PL1	0,061
Packaging Weight PL3	1,564
Packaging Width PL1	30
Packaging Width PL3	135

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+