
Product data sheet



GF Hycleen Balance balancing valve DN15

1162345

- Description: digital hydraulic balancing valve
- Temperature: delivery state: 57°C (setting range: 0-90°C), thermal disinfection (60-90°C)
- Nominal pressure: PN10
- Material: material: Gunmetal lead-free (RG+), stainless steel, EPDM

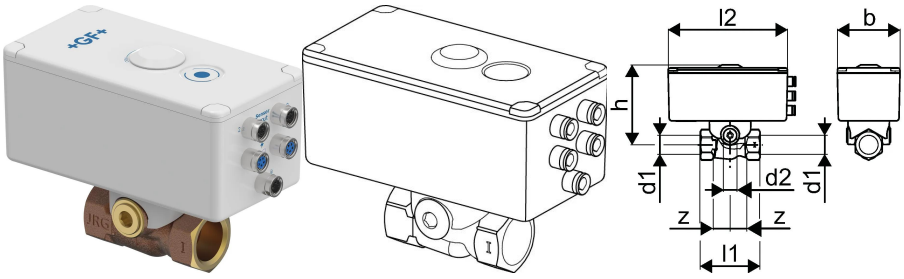

About GF Hycleen Balance balancing valve

Specification


- Dimension range DN25 – 65
- Number of people 4 - 2500
- Available with leakage protection (small devices)

Application

- House water inlet
- Single to multi family houses, public buildings and industries

GF Hycleen Balance balancing valve DN15

1162345

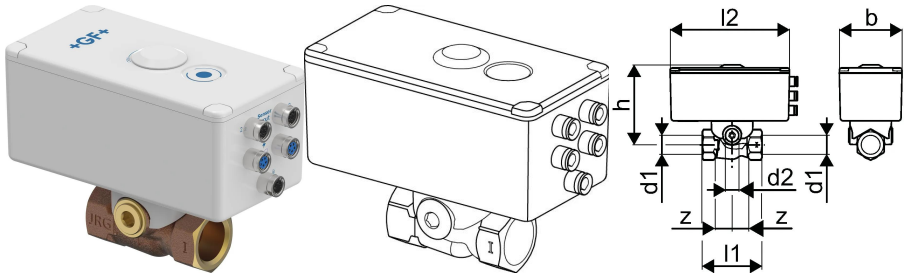

Status

Item Available From date	2026-03-01

Product code

Item no EAN	6414900394482
Item no GF	351112115
Item no GTIN	06414900394482
Item no LVI	2022396

Dimensions

Item Unit Height	95
Item Unit Length	120
Item Unit Weight	0,673
Item Unit Width	63
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414900394499
Packaging Height PL1	100
Packaging Length PL1	225
Packaging Quantity PL1	1
Packaging Type PL1	Base_Box
Packaging Volume PL1	0,003375
Packaging Weight PL1	0,8
Packaging Width PL1	150

Measurements

Z Measurement d1	1/2
Z Measurement d2	1/2
Z Measurement d3	M8

Z Measurement d3	M8
Z Measurement h	80
Z	18

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+