


GF Hycleen Insulation shell DN15/20

1162882

- Hycleen Balance / Flush insulation shell for valve DN 15 and DN 20
- Self-adhesive, black, made of EPP

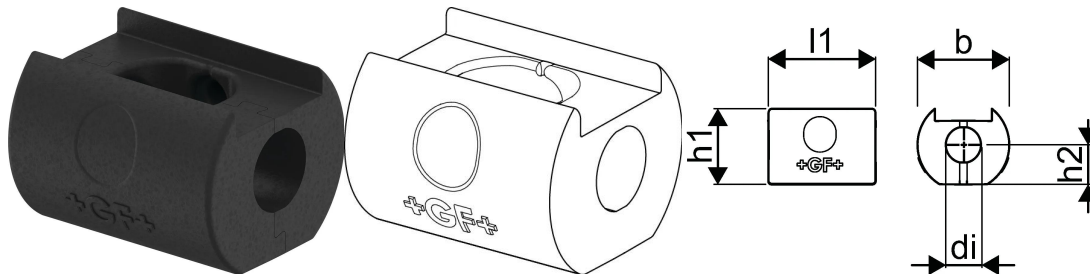

About GF Hycleen Insulation shell

Specification


- 30 V DC power supplies for Hycleen Balance and Flush systems
- Communication and extension cables with M8 push-pull connectors
- BMS connection via Modbus RTU
- Temperature sensors PT1000 and 4–20 mA sensor adapters
- Flow sensors and drain surveillance sensors
- Insulation shells made of EPP for DN15 and DN20 valves
- Sensor extension cables and spare sensor components

Application

- Power supply and electrical connection of Hycleen Balance and Flush systems
- Communication and bus extension between Hycleen components
- Integration with building management systems (BMS)
- Temperature, flow, and leakage monitoring in drinking water installations
- Protection, insulation and installation support of hygiene flushing valves

GF Hyclean Insulation shell DN15/20

1162882

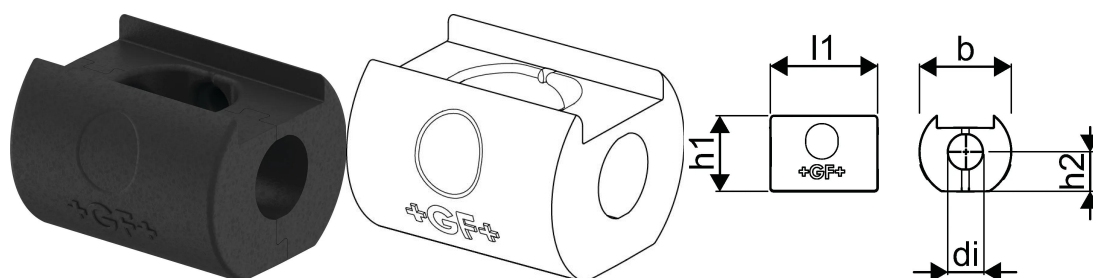

Status

Item Available From date

2026-03-01

Product code

Item no EAN 6414900451871

Item no GF 351112161

Item no GTIN 06414900451871

Item no LVI 2022404

Dimensions

Item Unit Height 100

Item Unit Length 140

Item Unit Weight 0,035

Item Unit Width 120

Item_UOM pce

Packaging

Packaging GTIN PL1 06414900451888

Packaging Height PL1 100

Packaging Length PL1 140

Packaging Quantity PL1 1

Packaging Type PL1 Plastic_Bag

Packaging Volume PL1 0,00168

Packaging Weight PL1 0,0370

Packaging Width PL1 120

Measurements

Z Measurement b 100

Z Measurement h 83

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb