
Product data sheet



GF Hycleen Insulation shell DN15/20

1162882

- Hycleen Balance / Flush insulation shell for valve DN 15 and DN 20
- Self-adhesive, black, made of EPP

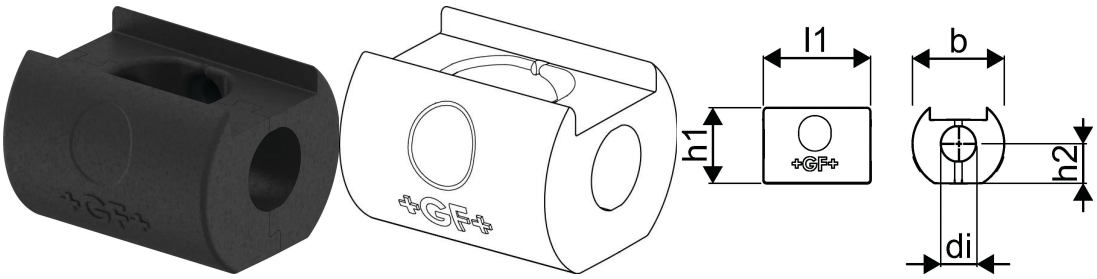

About GF Hycleen Insulation shell

Specification


- 30 V DC power supplies for Hycleen Balance and Flush systems
- Communication and extension cables with M8 push-pull connectors
- BMS connection via Modbus RTU
- Temperature sensors PT1000 and 4–20 mA sensor adapters
- Flow sensors and drain surveillance sensors
- Insulation shells made of EPP for DN15 and DN20 valves
- Sensor extension cables and spare sensor components

Application

- Power supply and electrical connection of Hycleen Balance and Flush systems
- Communication and bus extension between Hycleen components
- Integration with building management systems (BMS)
- Temperature, flow, and leakage monitoring in drinking water installations
- Protection, insulation and installation support of hygiene flushing valves

GF Hycleen Insulation shell DN15/20

1162882

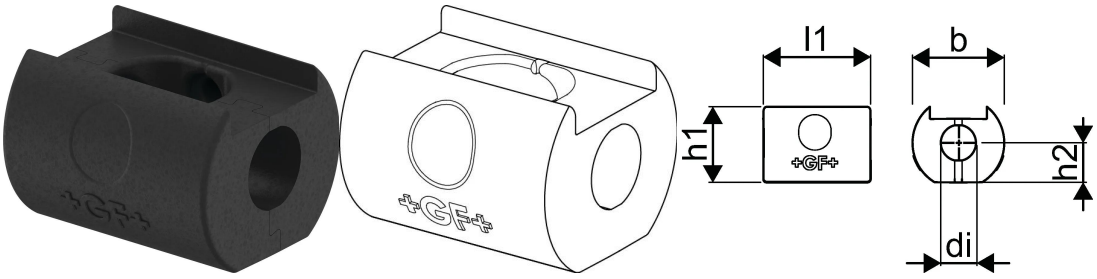

Status

Item Available From date	2026-03-01

Product code

Item no EAN	6414900451871
Item no GF	351112161
Item no GTIN	06414900451871
Item no LVI	2022404

Dimensions

Item Unit Height	100
Item Unit Length	140
Item Unit Weight	0,035
Item Unit Width	120
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414900451888
Packaging Height PL1	100
Packaging Length PL1	140
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,00168
Packaging Weight PL1	0,0370
Packaging Width PL1	120

Measurements

Z Measurement b	100
Z Measurement h	83

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+