
Product data sheet



GF Hycleen Power Supply 1.5m

1162883

- 30V DC power supply for Hycleen Balance / Flush
- Circulation control valves, max. 100m cable lengths and 10x valves
- Consisting of: 1.5m power cable

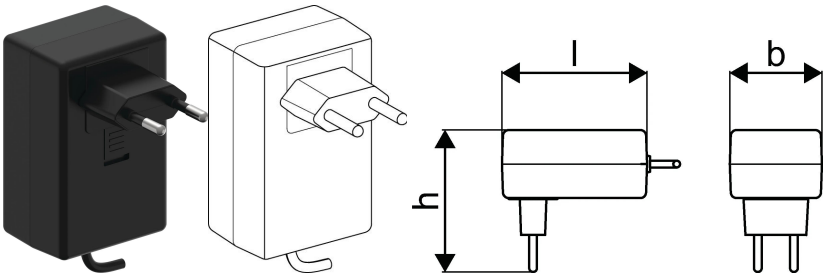

About GF Hycleen Power Supply

Specification


- 30 V DC power supplies for Hycleen Balance and Flush systems
- Communication and extension cables with M8 push-pull connectors
- BMS connection via Modbus RTU
- Temperature sensors PT1000 and 4–20 mA sensor adapters
- Flow sensors and drain surveillance sensors
- Insulation shells made of EPP for DN15 and DN20 valves
- Sensor extension cables and spare sensor components

Application

- Power supply and electrical connection of Hycleen Balance and Flush systems
- Communication and bus extension between Hycleen components
- Integration with building management systems (BMS)
- Temperature, flow, and leakage monitoring in drinking water installations
- Protection, insulation and installation support of hygiene flushing valves

GF Hycleen Power Supply 1.5m

1162883

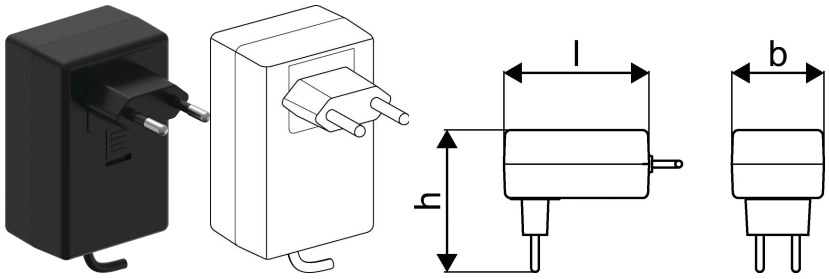

Status

Item Available From date	2026-03-01

Product code

Item no EAN	6414900451895
Item no GF	351112141
Item no GTIN	06414900451895
Item no LVI	2022405

Dimensions

Item Unit Height	80
Item Unit Length	160
Item Unit Weight	0,22
Item Unit Width	130
Item_UOM	pce

Measurements

LENGTH_L	48
Z Measurement b	35
Z Measurement h	77

Packaging

Packaging GTIN PL1	06414900451901
Packaging Height PL1	80
Packaging Length PL1	160
Packaging Quantity PL1	1
Packaging Type PL1	Base_Box
Packaging Volume PL1	0,001664
Packaging Weight PL1	0,280
Packaging Width PL1	130

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+