


GF Hycleen Power Supply 1.5m

1162883

- 30V DC power supply for Hycleen Balance / Flush
- Circulation control valves, max. 100m cable lengths and 10x valves
- Consisting of: 1.5m power cable

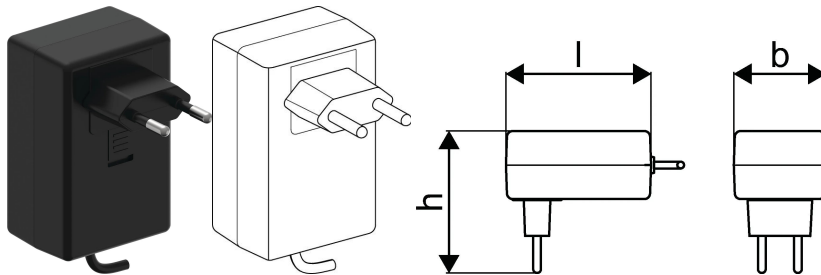

About GF Hycleen Power Supply

Specification


- 30 V DC power supplies for Hycleen Balance and Flush systems
- Communication and extension cables with M8 push-pull connectors
- BMS connection via Modbus RTU
- Temperature sensors PT1000 and 4–20 mA sensor adapters
- Flow sensors and drain surveillance sensors
- Insulation shells made of EPP for DN15 and DN20 valves
- Sensor extension cables and spare sensor components

Application

- Power supply and electrical connection of Hycleen Balance and Flush systems
- Communication and bus extension between Hycleen components
- Integration with building management systems (BMS)
- Temperature, flow, and leakage monitoring in drinking water installations
- Protection, insulation and installation support of hygiene flushing valves

GF Hycleen Power Supply 1.5m

1162883

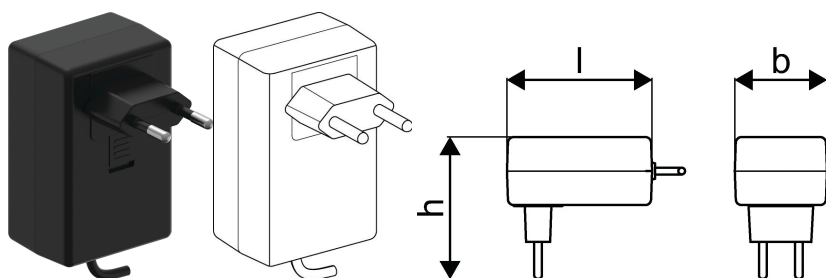

Status

Item Available From date

2026-03-01

Product code

Item no EAN 6414900451895

Item no GF 351112141

Item no GTIN 06414900451895

Item no LVI 2022405

Dimensions

Item Unit Height 80

Item Unit Length 160

Item Unit Weight 0,22

Item Unit Width 130

Item_UOM pce

Packaging

Packaging GTIN PL1 06414900451901

Packaging Height PL1 80

Packaging Length PL1 160

Packaging Quantity PL1 1

Packaging Type PL1 Base_Box

Packaging Volume PL1 0,001664

Packaging Weight PL1 0,280

Packaging Width PL1 130

Technical documents

[Download documents here](#)

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb