


GF Hycleen power supply and communication cable push-pull 1.5m

1162884

- 30V DC power supply for Hycleen Balance / Flush
- Circulation control valves, max. 100m cable lengths and 10x valves
- Consisting of: 1.5m power cable

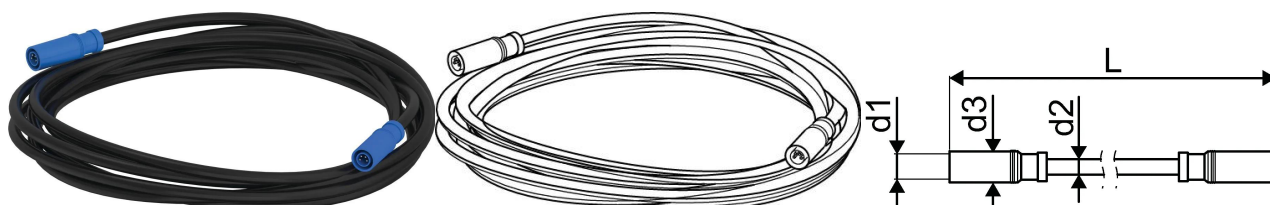

About GF Hycleen power supply and communication cable push-pull

Specification


- 30 V DC power supplies for Hycleen Balance and Flush systems
- Communication and extension cables with M8 push-pull connectors
- BMS connection via Modbus RTU
- Temperature sensors PT1000 and 4–20 mA sensor adapters
- Flow sensors and drain surveillance sensors
- Insulation shells made of EPP for DN15 and DN20 valves
- Sensor extension cables and spare sensor components

Application

- Power supply and electrical connection of Hycleen Balance and Flush systems
- Communication and bus extension between Hycleen components
- Integration with building management systems (BMS)
- Temperature, flow, and leakage monitoring in drinking water installations
- Protection, insulation and installation support of hygiene flushing valves

GF Hycleen power supply and communication cable push-pull 1.5m

1162884

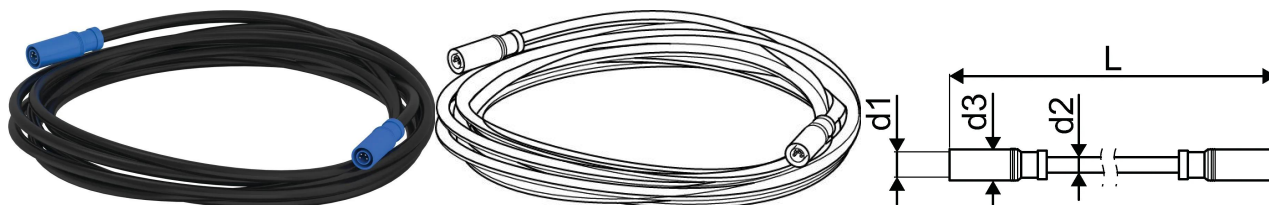

Status

Item Available From date

2026-03-01

Product code

Item no EAN

6414900451918

Item no GF

351112151

Item no GTIN

06414900451918

Item no LVI

2022406

Dimensions

Item Unit Height

15

Item Unit Length

260

Item Unit Weight

0,055

Item Unit Width

260

Item_UOM

pce

Packaging

Packaging GTIN PL1

06414900451925

Packaging Height PL1

15

Packaging Length PL1

260

Packaging Quantity PL1

1

Packaging Type PL1

Plastic_Bag

Packaging Volume PL1

0,001014

Packaging Weight PL1

0,0570

Packaging Width PL1

260

Technical documents

Download documents here

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb