
Product data sheet



GF Hycleen cable coupling

1162888

- Coupling for connecting two Hycleen Balance / Flush cables or extending the power cable with pre-assembled push/pull plug
- M8 plug connection

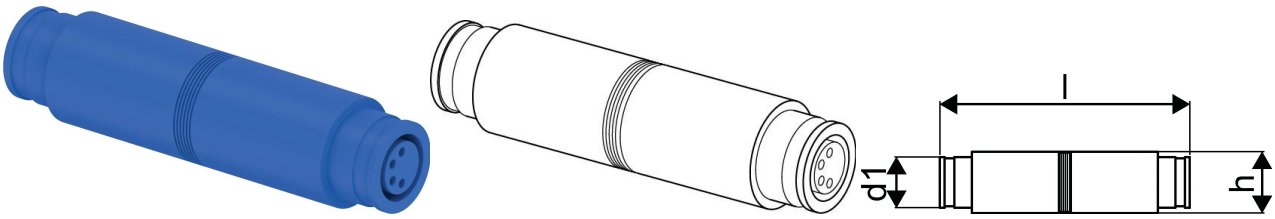

About GF Hycleen cable coupling

Specification


- 30 V DC power supplies for Hycleen Balance and Flush systems
- Communication and extension cables with M8 push-pull connectors
- BMS connection via Modbus RTU
- Temperature sensors PT1000 and 4–20 mA sensor adapters
- Flow sensors and drain surveillance sensors
- Insulation shells made of EPP for DN15 and DN20 valves
- Sensor extension cables and spare sensor components

Application

- Power supply and electrical connection of Hycleen Balance and Flush systems
- Communication and bus extension between Hycleen components
- Integration with building management systems (BMS)
- Temperature, flow, and leakage monitoring in drinking water installations
- Protection, insulation and installation support of hygiene flushing valves

GF Hycleen cable coupling

1162888

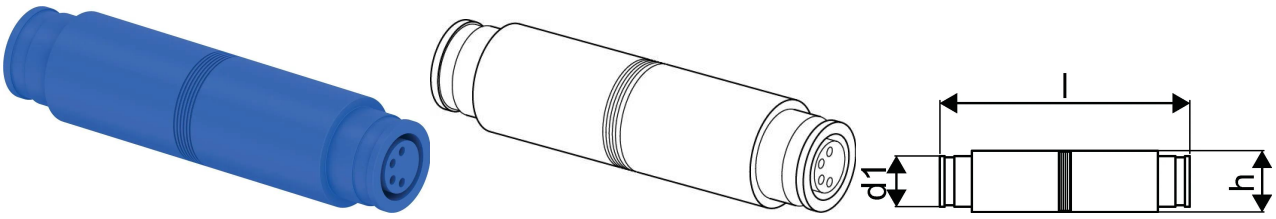

Status

Item Available From date	2026-03-01

Product code

Item no EAN	6414900451994
Item no GF	351112156
Item no GTIN	06414900451994
Item no LVI	2022411

Dimensions

Item Unit Height	15
Item Unit Length	130
Item Unit Weight	0,015
Item Unit Width	85
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414900452007
Packaging Height PL1	15
Packaging Length PL1	130
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,00016575
Packaging Weight PL1	0,0170
Packaging Width PL1	85

Measurements

Z Measurement d	M8

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+