


GF Hycleen cable coupling

1162888

- Coupling for connecting two Hycleen Balance / Flush cables or extending the power cable with pre-assembled push/pull plug
- M8 plug connection

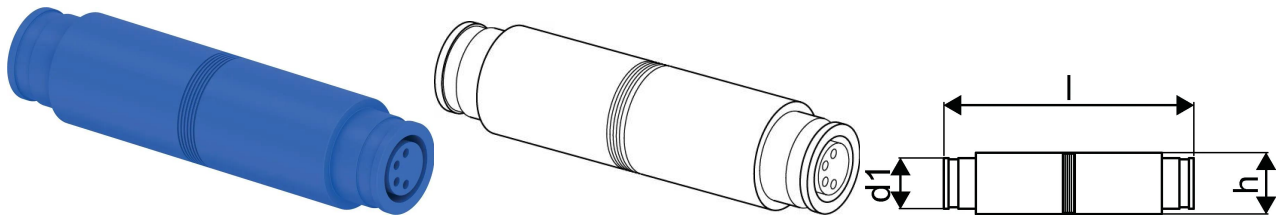

About GF Hycleen cable coupling

Specification


- 30 V DC power supplies for Hycleen Balance and Flush systems
- Communication and extension cables with M8 push-pull connectors
- BMS connection via Modbus RTU
- Temperature sensors PT1000 and 4–20 mA sensor adapters
- Flow sensors and drain surveillance sensors
- Insulation shells made of EPP for DN15 and DN20 valves
- Sensor extension cables and spare sensor components

Application

- Power supply and electrical connection of Hycleen Balance and Flush systems
- Communication and bus extension between Hycleen components
- Integration with building management systems (BMS)
- Temperature, flow, and leakage monitoring in drinking water installations
- Protection, insulation and installation support of hygiene flushing valves

GF Hycleen cable coupling

1162888

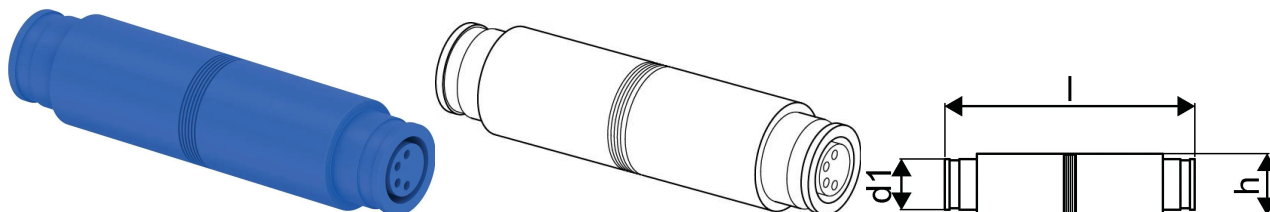

Status

Item Available From date 2026-03-01

Product code

Item no EAN 6414900451994

Item no GF 351112156

Item no GTIN 06414900451994

Item no LVI 2022411

Dimensions

Item Unit Height 15

Item Unit Length 130

Item Unit Weight 0,015

Item Unit Width 85

Item_UOM pce

Packaging

Packaging GTIN PL1 06414900452007

Packaging Height PL1 15

Packaging Length PL1 130

Packaging Quantity PL1 1

Packaging Type PL1 Plastic_Bag

Packaging Volume PL1 0,00016575

Packaging Weight PL1 0,0170

Packaging Width PL1 85

Measurements

Z Measurement d M8

Technical documents

Download documents here

www.uponor.com/en-gb