

GF Uponor Smatrix Wave controller Flow X-365 8X

1163372

Uponor Smatrix Wave controller Flow X-365 8X

- controller with autobalancing technology for radiant heating and cooling systems with wireless connection to Uponor Smatrix Wave thermostats and sensor
- supports up to 8 room thermostats and 10 actuators (24V) per controller
- schedule settings with programmable thermostat T-168
- heating/cooling change with input signal (GPI) or thermostat T-267
- switch for activating / deactivating autobalancing
- expand the system's functionality by adding optional devices

Options for system expansion with


- Uponor Smatrix Wave Flow com R-368
- Uponor Smatrix Wave expansion module Flow M-362 6X
- Uponor Smatrix Wave controller Flow X-365 8X (requires R-368)
- Uponor Smatrix Wave relay module M-161

Specifications

- protection class: Class II IP20
- color: white

Consisting of:

- Uponor Smatrix Wave controller Flow X-365 8X
- Uponor Smatrix Wave antenna Flow A-365
- Installation manual, safety instructions
- mounting material

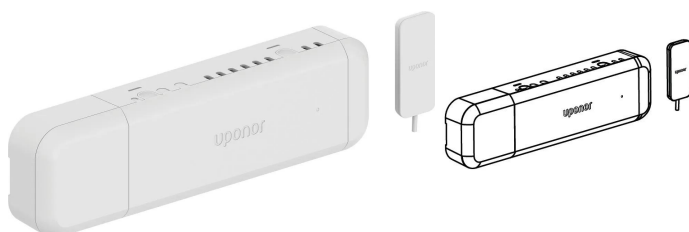

About GF Uponor Smatrix Wave controller Flow X-365 8X

Specification

- Up to 4 controllers in one system
- Operating voltage: 230V
- Autobalancing optimises energy use and comfort
- Electric control
- Supports up to 6 room thermostats and 8 actuators (24V) per controller
- Pump and boiler relays
- Valve and pump exercise
- Relative humidity control
- Combines underfloor heating/cooling and ceiling cooling control
- Max. power input per actuator: 24VAC / 0.2A (0.4A peak)

Smatrix Wave Pulse:

- Local access (Wi-Fi) or remote access (internet connection required) via Uponor Smatrix Pulse App (with R-208)
- Temporary wi-fi access point for direct access (if local wi-fi is not available) - (with R-208)
- Smart home ecosystem integration (Amazon Alexa, Google Home) - (with R-208)
- Multi-home control (with R-208)
- Third-party access for remote support (user allowance required) - (with R-208)
- History trend analysis via Uponor Smatrix Pulse app (with R-208)
- Timer programming (with R-208)
- Comfort settings (with R-208)
- Supply diagnostics (with R-208)

Application


- Wireless room temperature control for radiant heating and cooling
- Set point range: +5°C - +35°C

Certification

- CE, UKCA

GF Uponor Smatrix Wave controller Flow X-365 8X

1163372

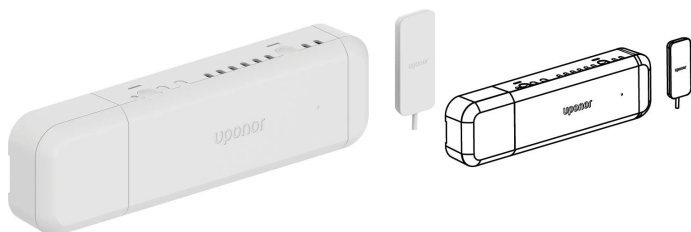**Status**

Item Available From date

2026-10-01

Product code

Item no EAN	6414900336697
Item no GF	35001163372
Item no GTIN	06414900336697
Item no LVI	2022415
Item no NRF	1619537
Item no RSK	2973384
Item no VVS	466251350

Dimensions

Item Unit Height	55
Item Unit Length	371.5
Item Unit Weight	1,62
Item Unit Width	106
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414900619721
Packaging GTIN PL2	06414900619745
Packaging GTIN PL4	06414900571531
Packaging Height PL1	78
Packaging Height PL2	300
Packaging Height PL4	900
Packaging Length PL1	380
Packaging Length PL2	400
Packaging Length PL4	1200
Packaging Material (number) PL1	20
Packaging Material (number) PL2	20

Packaging Material PL1	corrugated cardboard / cartone
Packaging Material PL2	corrugated cardboard / cartone
Packaging Material (short) PL1	PAP_C
Packaging Material (short) PL2	PAP_C
Packaging Quantity PL1	1
Packaging Quantity PL2	4
Packaging Quantity PL4	96
Packaging Type PL1	Base_Box
Packaging Type PL2	Medium_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0045942
Packaging Volume PL2	0,036
Packaging Volume PL4	0,864
Packaging Weight PL1	1,728
Packaging Weight PL2	7,412
Packaging Weight PL4	202,888
Packaging Width PL1	155
Packaging Width PL2	300
Packaging Width PL4	800

Technical data

Recycling Text Block PL1	corrugated cardboard / cartone
Recycling Text Block PL2	corrugated cardboard / cartone

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E
customerservice.uk.bfs@georgfischer.com