


Uponor Vario S manifold FM glass gen.2 0-5 l/min.

1184879

- Flowmeter glass

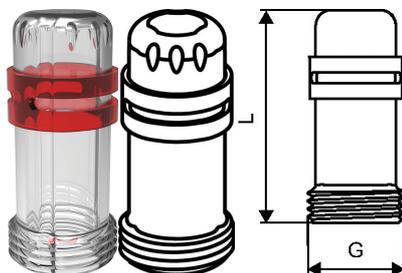

About Uponor Vario S manifold FM glass gen.2

Specification


- Made of stainless steel, with integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill & drain points in supply/return
- Loop connection G3/4" Eurocone c-c 50 mm
- Header pitch 215 mm

Application

- For underfloor-heating and -cooling
- For use with with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

Uponor Vario S manifold FM glass gen.2 0-5 l/min.

1184879

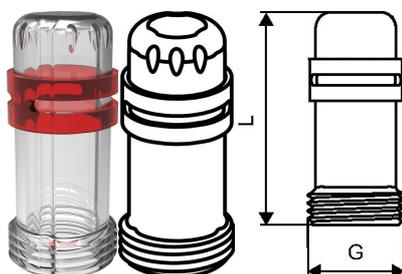

Status

Item Available From date

2025-12-10

Product code

Item no EAN

6414900137164

Item no GTIN

06414900137164

Dimensions

Item Unit Height

17

Item Unit Length

66.5

Item Unit Weight

0,009

Item Unit Width

17

Item_UOM

pce

Measurements

LENGTH_L

40,1

Metric thread M

18

Technical data

Recycling Text Block PL1

corrugated cardboard / cartone

Packaging

Packaging GTIN PL1

06414900619219

Packaging Height PL1

110

Packaging Length PL1

155

Packaging Material (number) PL1

20

Packaging Material PL1

corrugated cardboard / cartone

Packaging Material (short) PL1

PAP_C

Packaging Quantity PL1

10

Packaging Type PL1

Base_Box

Packaging Volume PL1

0,0018755

Packaging Weight PL1

0,24

Packaging Width PL1

110

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb