

Vario S 1" stainless-steel manifolds

Project information


Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

Technical data

Cv	1.17
Material	Stainless Steel
Subcomponent Material	Manifold Components: Brass
Manifold size	1 inch
End type 1	FNPT 1"
End type 2	ISO 228-G 3/4"
Temp/pressure ratings	68 °F (20 °C) at 145 psi (10 bar) 158 °F (70 °C) at 87 psi (6 bar) 194 °F (90 °C) at 44 psi (3 bar)
Max. fluid flow rate	24 gpm
Prop 65 label required?	Yes

Product information and application use

The Uponor Vario S 1" Manifolds are manufactured from durable, corrosion-resistant stainless steel and accommodate flows up to 14 gallons per minute (gpm) for residential and commercial radiant heating and cooling applications. The preassembled manifolds come ready to install right out of the box and feature isolation valves, balancing valves with flow meters, and supply and return ball valves with 1" NPT thread and temperature gauges.

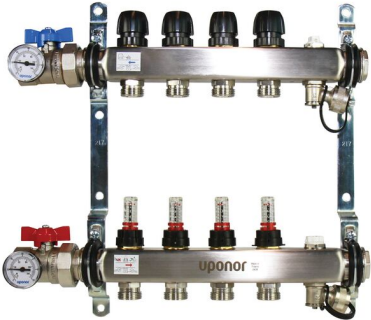

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	H [inch]	Weight per UOM [lbs/UOM]
Vario S 1" Manifold FM, 2 loops	A3700200	11.177	14.055	3.512	1.969	4.976	1.181	1.969	7.299	9.2

Installation

Related applications

Refer to the Uponor Vario S 1" Manifold Instruction Sheet for complete details.

Radiant heating and cooling

Footnotes

Contact information

-	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517
---	---	---