Transformers

Project information


Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

Technical data

Prop 65 label required? Yes

Product information and application use

The 50 VA Transformer (24VAC) features a foot or hub mount for a 2" x 2" or 4" x 4" electrical box with a ¾" knockout.

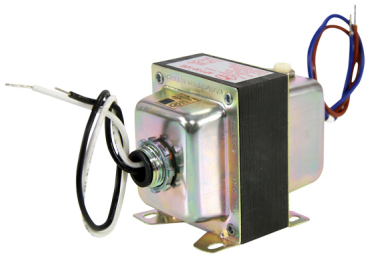

	Part name	Part no.	A [inch]	B [inch]	C [inch]	Current draw max. [A]	Operating voltage [V]	Operating voltage AC [VAC]	Voltage secondary AC (50VA) [VAC]	Output rating at 24VAC [A]	Weight per UOM [lbs/UOM]
✔	50 VA Transformer	A3050050	4.422	2.5	3.005	0.55	24	120	24	2.1	2.56

Installation

When mounting transformer in a knockout, install in a metal box only. Refer to the Uponor Radiant Installation Handbook for additional information.

Related applications

Radiant Heating and Cooling Systems

Notes

Primary: White - Black, 120 V, 60 Hz, 0.55 A

Footnotes

-

Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517

© 2026 Uponor North America. All Rights Reserved