
# EP flow-through multi-port elbows

## Project information

| | |
|---|---|
| Job name: | Location: |
| Engineer: | Date submitted: |
| Contractor: | Submitted by: |
| Manufacturer's representative: | Approved by: |

## Technical data

| | |
|---|---|
| Material | Engineered Polymer |
| End type 1 | ProPEX 3/4" |
| End type 2 | ProPEX 3/4" |
| End type 3 | ProPEX 1/2" |
| Temp/pressure ratings | 73 °F (23 °C) at 160 psi (11 bar)<br>180 °F (82 °C) at 100 psi (6.9 bar)<br>200 °F (93 °C) at 80 psi (5.5 bar) |

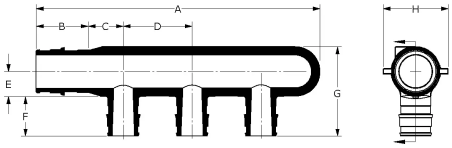


## Product information and application use

Engineered polymer (EP) flow-through multi-port elbows feature an integrated ¾" ProPEX® elbow with ½" ProPEX branch outlets. The elbows are designed for slab-on-grade, potable-plumbing applications to eliminate the need for multiple connections.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

| | Part name | Part no. | A [inch] | B [inch] | C [inch] | D [inch] | E [inch] | F [inch] | G [inch] | H [inch] | Cv Through |
|---|---|---|---|---|---|---|---|---|---|---|---|
| ✔ | EP Flow-through Multi-port Elbow, 3 (1/2") outlets, 3/4" x 3/4" ProPEX | Q2235577 | 6.17 | 0.955 | 0.625 | 1.25 | 0.467 | 0.719 | 1.87 | 1.18 | 7.1 |
| | EP Flow-through Multi-port Elbow, 4 (1/2") outlets, 3/4" x 3/4" ProPEX | Q2245577 | 7.42 | 0.955 | 0.625 | 1.25 | 0.467 | 0.719 | 1.87 | 1.18 | 7.1 |

| Part name | Part no. | Codes | Standards | Listings |
|---|---|---|---|---|
| EP flow-through multi-port elbows | All | UPC\|IBC\|IRC\|IPC\|NPC of Canada\|UMC\|NSPC\|IMC | ASTM E814/ULC S115\|ASTM F877\|ASTM F1960\|CSA B137.5\|ULC S102.2\|ASTM E119/UL 263\|ULC S101 | IAPMO-ES\|HUD MR 1269\|ICC-ES-PMG\|cNSFus-pw\|UL\|U.P.Code\|cQAIus P321 |
| In addition, the following parts have additional codes, standards, or listings: | | | | |
| EP Flow-through Multi-port Elbow, 3 (1/2") outlets, 3/4" x 3/4" ProPEX | Q2235577 | | NSF/ANSI/CAN 61\|NSF/ANSI 14 | |
| EP Flow-through Multi-port Elbow, 4 (1/2") outlets, 3/4" x 3/4" ProPEX | Q2245577 | | NSF-61\|NSF-14 | |

## Installation

Any product designed to mount 1" copper pipe is suitable for use as a mounting bracket. For more information, refer to the Uponor Piping Systems Installation Guide.

## Related applications

PEX-a Plumbing Systems

## Footnotes

-

## Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517

© 2026 Uponor North America. All Rights Reserved