

Uponor PP-RCT flange adapters (butt fusion)

Project Information


Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

Technical data

Material PP-RCT

Product information and application use

Use Uponor PP-RCT flange adapters with Uponor PP-RCT mechanical pipe to convey water for hydronic heating and cooling or industrial applications. Note: The 4" flange adapters can be butt fused or socket fused if used with the Uponor PP-RCT Coupling, 4" x 4" (PR4774040).

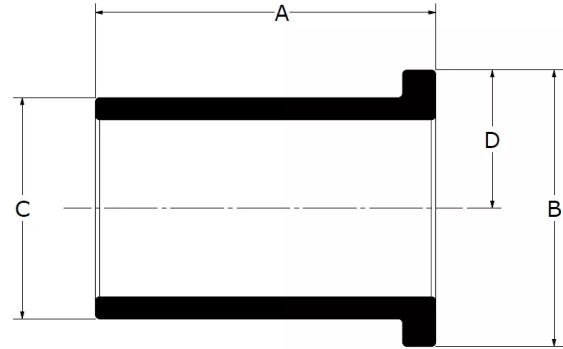

Part name	Part no.	A [Inch]	B [Inch]	C [Inch]	D [Inch]	End Type 1	End Type 2	Operating Temperature 1 [°F]	Operating Temperature 2 [°F]	Operating Temperature 3 [°F]	Weight per UOM [lbs/UOM]
Uponor PP-RCT Flange Adapter, 10", SDR 11	PR11298100	6.496	12.598	9.843	6.299	Butt 10"	Flange	73 °F (23 °C) at 215 psi (23 °C)	140 °F (60 °C) at 120 psi (60 °C)	180 °F (82 °C) at 80 psi (82 °C)	7.16
Uponor PP-RCT Flange Adapter, 12", SDR 11	PR11298120	6.496	14.567	12.402	7.283	Butt 12"	Flange	73 °F (23 °C) at 215 psi (23 °C)	140 °F (60 °C) at 120 psi (60 °C)	180 °F (82 °C) at 80 psi (82 °C)	9.87
Uponor PP-RCT Flange Adapter, 4", SDR 11, Butt or Socket Fused with Coupling	PR1129840	7.697	6.205	4.961	3.102	Butt 4"	Flange	73 °F (23 °C) at 215 psi (23 °C)	140 °F (60 °C) at 120 psi (60 °C)	180 °F (82 °C) at 80 psi (82 °C)	2.03
Uponor PP-RCT Flange Adapter, 6", SDR 11	PR1129860	7.697	8.504	6.339	4.252	Butt 6"	Flange	73 °F (23 °C) at 215 psi (23 °C)	140 °F (60 °C) at 120 psi (60 °C)	180 °F (82 °C) at 80 psi (82 °C)	3.64
Uponor PP-RCT Flange Adapter, 8", SDR 11	PR1129880	6.496	10.433	7.874	5.217	Butt 8"	Flange	73 °F (23 °C) at 215 psi (23 °C)	140 °F (60 °C) at 120 psi (60 °C)	180 °F (82 °C) at 80 psi (82 °C)	4.85
Uponor PP-RCT Flange Adapter, 10", SDR 17.6	PR17298100	6.496	12.598	9.843	6.299	Butt 10"	Flange	73 °F (23 °C) at 130 psi (23 °C)	140 °F (60 °C) at 70 psi (60 °C)	180 °F (82 °C) at 50 psi (82 °C)	5.46
Uponor PP-RCT Flange Adapter, 12", SDR 17.6	PR17298120	6.496	14.567	12.402	7.283	Butt 12"	Flange	73 °F (23 °C) at 130 psi (23 °C)	140 °F (60 °C) at 70 psi (60 °C)	180 °F (82 °C) at 50 psi (82 °C)	7.17
Uponor PP-RCT Flange Adapter, 4", SDR 17.6, Butt or Socket Fused with Coupling	PR1729840	7.697	6.205	4.961	3.102	Butt 4"	Flange	73 °F (23 °C) at 130 psi (23 °C)	140 °F (60 °C) at 70 psi (60 °C)	180 °F (82 °C) at 50 psi (82 °C)	1.43
Uponor PP-RCT Flange Adapter, 6", SDR 17.6	PR1729860	7.697	8.504	6.339	4.252	Butt 6"	Flange	73 °F (23 °C) at 130 psi (23 °C)	140 °F (60 °C) at 70 psi (60 °C)	180 °F (82 °C) at 50 psi (82 °C)	2.85
Uponor PP-RCT Flange Adapter, 8", SDR 17.6	PR1729880	5.315	10.433	7.898	5.217	Butt 8"	Flange	73 °F (23 °C) at 130 psi (23 °C)	140 °F (60 °C) at 70 psi (60 °C)	180 °F (82 °C) at 50 psi (82 °C)	3.27
Uponor PP-RCT Flange Adapter, 10", SDR 9	PR9298100	6.496	12.598	9.843	6.299	Butt 10"	Flange	73 °F (23 °C) at 265 psi (23 °C)	140 °F (60 °C) at 150 psi (60 °C)	180 °F (82 °C) at 100 psi (82 °C)	8.12
Uponor PP-RCT Flange Adapter, 12", SDR 9	PR9298120	6.496	14.567	12.402	7.283	Butt 12"	Flange	73 °F (23 °C) at 265 psi (23 °C)	140 °F (60 °C) at 150 psi (60 °C)	180 °F (82 °C) at 100 psi (82 °C)	11.41
Uponor PP-RCT Flange Adapter, 4", SDR 9, Butt or Socket Fused with Coupling	PR929840	3.937	6.496	4.921	3.248	Butt 4"	Flange	73 °F (23 °C) at 265 psi (23 °C)	140 °F (60 °C) at 150 psi (60 °C)	180 °F (82 °C) at 100 psi (82 °C)	1.31
Uponor PP-RCT Flange Adapter, 6", SDR 9	PR929860	7.697	8.504	6.339	4.252	Butt 6"	Socket	73 °F (23 °C) at 265 psi (23 °C)	140 °F (60 °C) at 150 psi (60 °C)	180 °F (82 °C) at 100 psi (82 °C)	3.94

Uponor PP-RCT Flange Adapter, 8", SDR 9	PR929880	6.496	10.433	7.874	5.217	Butt 8"	Flange	73 °F (23 °C) at 265 psi (23 °C)	140 °F (60 °C) at 150 psi (60 °C)	180 °F (82 °C) at 100 psi (82 °C)	5.38
---	----------	-------	--------	-------	-------	---------	--------	----------------------------------	-----------------------------------	-----------------------------------	------

Part name	Part no.	Codes	Standards	Listings
Uponor PP-RCT flange adapters (butt fusion)	All	CMC	ASTM E84 ASTM F2389 CSA B137.11	ICC-ES-PMG 1106 IAPMO-R&T 8358 QAI P321-5 IAPMO K-12775

In addition, the following parts have additional codes, standards, or listings:

Uponor PP-RCT Flange Adapter, 10", SDR 11	PR11298100	UPC IRC IPC NPC of Canada UMC CPC IMC	NSF/ANSI/CAN 61 NSF/ANSI 14
Uponor PP-RCT Flange Adapter, 12", SDR 11	PR11298120	UPC IRC IPC NPC of Canada UMC CPC IMC	NSF/ANSI/CAN 61 NSF/ANSI 14
Uponor PP-RCT Flange Adapter, 4", SDR 11, Butt or Socket Fused with Coupling	PR1129840	UPC IRC IPC NPC of Canada UMC CPC IMC	ASTM F1960 NSF/ANSI/CAN 61 NSF/ANSI 14
Uponor PP-RCT Flange Adapter, 6", SDR 11	PR1129860	UPC IRC IPC NPC of Canada UMC CPC IMC	ASTM F1960 NSF/ANSI/CAN 61 NSF/ANSI 14
Uponor PP-RCT Flange Adapter, 8", SDR 11	PR1129880	UPC IRC IPC NPC of Canada UMC CPC IMC	ASTM F1960 NSF/ANSI/CAN 61 NSF/ANSI 14
Uponor PP-RCT Flange Adapter, 10", SDR 17.6	PR17298100	IMC UMC	ASTM F1960 NSF-14
Uponor PP-RCT Flange Adapter, 12", SDR 17.6	PR17298120	IMC UMC	ASTM F1960 NSF-14
Uponor PP-RCT Flange Adapter, 8", SDR 17.6	PR1729880	IMC UMC	ASTM F1960 NSF-14
Uponor PP-RCT Flange Adapter, 10", SDR 9	PR9298100	UPC IRC IPC NPC of Canada UMC CPC IMC	NSF/ANSI/CAN 61 NSF/ANSI 14
Uponor PP-RCT Flange Adapter, 12", SDR 9	PR9298120	UPC IRC IPC NPC of Canada UMC CPC IMC	NSF/ANSI/CAN 61 NSF/ANSI 14
Uponor PP-RCT Flange Adapter, 4", SDR 9, Butt or Socket Fused with Coupling	PR929840	UPC IRC IPC NPC of Canada UMC CPC IMC	NSF/ANSI/CAN 61 NSF/ANSI 14
Uponor PP-RCT Flange Adapter, 6", SDR 9	PR929860	UPC IRC IPC NPC of Canada UMC CPC IMC	ASTM F1960 NSF/ANSI/CAN 61 NSF/ANSI 14
Uponor PP-RCT Flange Adapter, 8", SDR 9	PR929880	UPC IRC IPC NPC of Canada UMC CPC IMC	ASTM F1960 NSF/ANSI/CAN 61 NSF/ANSI 14

Installation	Related applications
Use approved butt-fusion connection methods. Refer to the Uponor PP-RCT manual for complete details.	Hydronic heating and cooling systems Industrial

Footnotes	Contact information
-	<p>Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008</p> <p>Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517</p>