

# Uponor PP-RCT 90 elbows fabricated (butt fusion)

## Project Information


Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

## Technical data

Material PP-RCT

## Product information and application use

Use Uponor PP-RCT 45 fabricated elbows with Uponor PP-RCT mechanical pipe to convey water for hydronic heating and cooling or industrial applications.

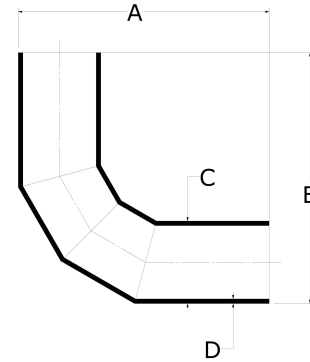

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	Equivalent length through [ft]	Operating Temperature 1 [°F]	Operating Temperature 2 [°F]	Operating Temperature 3 [°F]
Uponor PP-RCT 90 Elbow, Mechanical, 6" x 6", SDR 11	PR1147690600	22.39	22.39	6.299	0.579	-	-	17.2	73 °F (23 °C) at 215 psi (23 °C)	140 °F (60 °C) at 120 psi (60 °C)	180 °F (82 °C) at 80 psi (82 °C)
Uponor PP-RCT 90 Elbow, Mechanical, 12" x 12", SDR 17.6	PR174769012	31.201	31.201	12.402	0.705	-	-	36.6	73 °F (23 °C) at 130 psi (23 °C)	140 °F (60 °C) at 70 psi (60 °C)	180 °F (82 °C) at 50 psi (82 °C)
Uponor PP-RCT 90 Elbow, Mechanical, 6" x 6", SDR 17.6	PR174769060	22.39	22.39	6.299	0.358	-	-	19.8	73 °F (23 °C) at 130 psi (23 °C)	140 °F (60 °C) at 70 psi (60 °C)	180 °F (82 °C) at 50 psi (82 °C)
Uponor PP-RCT 90 Elbow, Mechanical, 6" x 6", SDR 9	PR947690600	22.39	22.39	6.299	0.7	-	-	18	73 °F (23 °C) at 265 psi (23 °C)	140 °F (60 °C) at 150 psi (60 °C)	180 °F (82 °C) at 100 psi (82 °C)
Uponor PP-RCT 90 Elbow, Mechanical, 8" x 8", SDR 9	PR947690800	23.937	23.937	7.874	0.882	-	-	21.5	73 °F (23 °C) at 265 psi (23 °C)	140 °F (60 °C) at 150 psi (60 °C)	180 °F (82 °C) at 100 psi (82 °C)
Uponor PP-RCT 90 Elbow, Mechanical, 8" x 8", SDR 17.6	PR174769080	23.937	23.937	7.874	0.449	-	-	23.3	73 °F (23 °C) at 130 psi (23 °C)	140 °F (60 °C) at 70 psi (60 °C)	180 °F (82 °C) at 50 psi (82 °C)
Uponor PP-RCT 90 Elbow, Mechanical, 10" x 10", SDR 17.6	PR174769010	26.929	26.929	9.843	0.559	-	-	29.1	73 °F (23 °C) at 130 psi (23 °C)	140 °F (60 °C) at 70 psi (60 °C)	180 °F (82 °C) at 50 psi (82 °C)

Part name	Part no.	Weight per UOM [lbs/UOM]
Uponor PP-RCT 90 Elbow, Mechanical, 6" x 6", SDR 11	PR1147690600	12.58
Uponor PP-RCT 90 Elbow, Mechanical, 12" x 12", SDR 17.6	PR174769012	42.04
Uponor PP-RCT 90 Elbow, Mechanical, 6" x 6", SDR 17.6	PR174769060	8.47
Uponor PP-RCT 90 Elbow, Mechanical, 6" x 6", SDR 9	PR947690600	15.15
Uponor PP-RCT 90 Elbow, Mechanical, 8" x 8", SDR 9	PR947690800	23.9
Uponor PP-RCT 90 Elbow, Mechanical, 8" x 8", SDR 17.6	PR174769080	13.34
Uponor PP-RCT 90 Elbow, Mechanical, 10" x 10", SDR 17.6	PR174769010	23.5

Part name	Part no.	Codes	Standards	Listings
Uponor PP-RCT 90 elbows fabricated (butt fusion)	All	CMC IMC UMC	ASTM E84 NSF/ANSI 14 ASTM F2389 CSA B137.11	ICC-ES-PMG 1106 IAPMO-R&T 8358 QAI P321-5 IAPMO K-12775

Installation	Related applications
--------------	----------------------

Use approved butt-fusion connection methods. Refer to the Uponor PP-RCT manual for complete details.	Hydronic heating and cooling systems Industrial
--	--

Footnotes	Contact information
-----------	---------------------

-	<table><tr><td>Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008</td><td>Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517</td></tr></table>	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517
Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517		