

Uponor PP-RCT cold potable pipes, SDR 7.4

Project information


Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

Technical data

Material	PP-RCT
Temp/pressure ratings	73 °F (23 °C) at 335 psi (23 bar) 120 °F (49 °C) at 221 psi (15.2 bar) 180 °F (82 °C) at 100 psi (6.9 bar)
Prop 65 label required?	No

Product information and application use

Use Uponor PP-RCT cold potable pipe to convey water for cold potable plumbing applications as well as other lower-pressure, lower-temperature applications.

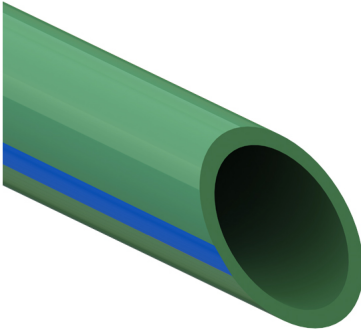

Part name	Part no.	Inner diameter pipe [inch]	Outer diameter pipe [inch]	Weight per UOM [lbs/UOM]
1/2" Uponor PP-RCT Cold Potable Pipe, SDR 7.4, 13-ft. straight length	PR72213500	0.567	0.787	1.3
3/4" Uponor PP-RCT Cold Potable Pipe, SDR 7.4, 13-ft. straight length	PR72213750	0.709	0.984	2.08

Part name	Part no.	Codes	Standards	Listings
Uponor PP-RCT cold potable pipes, SDR 7.4	All	UPC IRC IPC NPC of Canada UMC CMC CPC IMC	NSF/ANSI/CAN 61 ASTM E84 NSF/ANSI 51 ASTM F2389 CSA B137.11	ICC-ES-PMG 1106 IAPMO-R&T 8358 QAI P321-5 IAPMO K-12775

Installation

Related applications

Use approved butt-fusion or socket-fusion connection methods. Refer to the Uponor PP-RCT manual for complete details.

-

Footnotes

Contact information

-	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517
---	-----------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------