

# Compression wall seal

## Project Information


Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

## Technical data

Material	Rubber
Prop 65 label required?	Yes

## Product Information and application use

Ecoflex® compression wall seals can be used with wall sleeves, or can be used alone where a field core drill is preferred. It creates a watertight seal between the core drill surface and the outer jacket of Ecoflex piping.

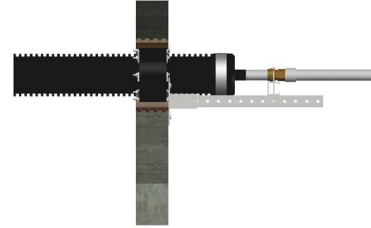

Part name	Part no.	Inner diameter pipe [Inch]	Outer diameter pipe [Inch]	Weight per UOM [lbs/UOM]
Compression Wall Seal for 2.7" Jacket	1007358	2.7559	4.7638	2.6
Compression Wall Seal for 5.5" Jacket	1007360	5.5118	7.874	5.1
Compression Wall Seal for 6.9" Jacket	1007361	6.9685	9.7638	7.8
Compression Wall Seal for 7.9" Jacket	1007362	7.9528	9.8819	6.1

## Installation

For new concrete walls, install over the pipe and Ecoflex compression wall seals into the wall sleeve for a watertight seal. For an existing wall with a field core drill, install between core drill surface and outer jacket of the Ecoflex pipe. Refer to the Uponor Pre-insulated Pipe Systems Design and Installation Manual for more information.

## Related applications

- Pre-Insulated Pipe Systems
- Radiant Heating and Cooling Systems
- Permafrost Protection Systems
- Turf Conditioning Systems

## Codes

## Standards

## Listings

## Notes

- Core Drill OD - 4.75"
- Core Drill OD - 8"
- Core Drill OD - 10"

## Footnotes

## Contact information

-	<p>Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008</p>	<p>Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517</p>
---	--	--