

ProPEX manifold fitting assemblies

Project information


Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

Technical data

Material	Brass
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

Product information and application use

The Uponor ProPEX® Fitting Assembly threads onto Uponor manifold loop outlets. The fitting features an R20 or R25 thread with a ProPEX connection to connect Uponor crosslinked polyethylene (PEX) tubing to the manifold in radiant heating and cooling applications.

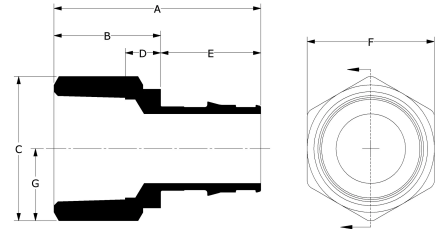

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	Weight per UOM [lbs/UOM]
3/8" ProPEX Fitting Assembly, R20 Thread	Q4020375	1.196	0.605	1.368	0.285	0.591	1.187	0.684	0.18
1/2" ProPEX Fitting Assembly, R20 Thread	Q4020500	1.321	0.612	1.368	0.285	0.709	1.187	0.684	0.18
5/8" ProPEX Fitting Assembly, R20 Thread	Q4020625	1.468	0.602	1.368	0.285	0.866	1.187	0.684	0.2
3/4" ProPEX Fitting Assembly, R20 Thread	Q4020750	1.55	0.605	1.368	0.285	0.945	1.187	0.684	0.19
5/8" ProPEX Fitting Assembly, R25 thread	Q4030625	1.634	0.768	1.729	0.285	0.866	1.5	0.865	0.4
5/8" ProPEX Fitting Assembly for Commercial Manifold, R25 thread	Q4050625	1.634	0.768	1.729	0.275	0.866	1.5	-	0.37
3/4" ProPEX Fitting Assembly for Commercial Manifold, R25 thread	Q4050750	1.713	0.768	1.729	0.275	0.945	1.5	-	0.36
1" ProPEX Fitting Assembly for Commercial Manifold, R25 thread	Q4051000	1.949	0.768	1.729	0.275	1.181	1.5	-	0.38

Part name	Part no.	Codes	Standards	Listings
ProPEX manifold fitting assemblies	All	-	-	-

In addition, the following parts have additional codes, standards, or listings:

3/8" ProPEX Fitting Assembly, R20 Thread	Q4020375	IMC IRC NBC of Canada UMC	ASTM F1960 CSA B137.5 ASTM F877 R20:	cNSFus-rfh ICC-ES-PMG 1012
5/8" ProPEX Fitting Assembly for Commercial Manifold, R25 thread	Q4050625	IRC NBC of Canada UMC IMC	ASTM F877 ASTM F1960 CSA B137.5 R25:	IAPMO-ES ICC PMG 1006 cNSFus-rfh ICC-ES-PMG 1012
3/4" ProPEX Fitting Assembly for Commercial Manifold, R25 thread	Q4050750	IRC NBC of Canada UMC IMC	ASTM F877 ASTM F1960 CSA B137.5 R25:	IAPMO-ES ICC PMG 1006 cNSFus-rfh ICC-ES-PMG 1012
1" ProPEX Fitting Assembly for Commercial Manifold, R25 thread	Q4051000	IRC NBC of Canada UMC IMC	ASTM F877 ASTM F1960 CSA B137.5 R25:	IAPMO-ES ICC PMG 1006 cNSFus-rfh ICC-ES-PMG 1012

Installation

R20 or R25 threads onto the Uponor manifold loop outlets. Compression end enables direct connection to Uponor PEX tubing. For more information, refer to the Uponor Radiant Floor Heating Installation Handbook. Accessories: Replacement O-ring for insert, R20 (A4021116); Replacement O-ring for insert, R25 (A4021000)

Related applications

Radiant Heating and Cooling Systems

Footnotes

-

Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517