


TruFLOW Jr. valveless manifolds

Project Information

| | |
|--------------------------------|-----------------|
| Job name: | Location: |
| Engineer: | Date submitted: |
| Contractor: | Submitted by: |
| Manufacturer's representative: | Approved by: |

Technical data

| | |
|-------------------------|--|
| Material | Brass |
| Manifold size | 1 inch |
| Loop Cv | 1.9 Cv |
| End type 1 | ISO 228-G 1-1/4" |
| End type 2 | ISO 228-G 3/4" |
| Temp/pressure ratings | 73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar) |
| Max. fluid flow rate | 14 gpm |
| Prop 65 label required? | Yes |

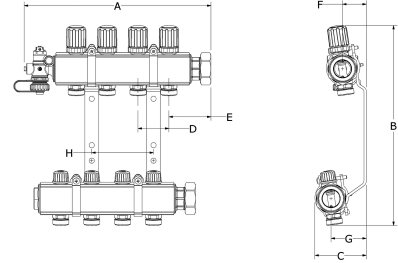

Product information and application use

Use the TruFLOW™ Jr. Valveless Manifold with either the TruFLOW Jr. Manifold with Isolation Valves or the TruFLOW Jr. Manifold with Balancing Valves to complete the manifold set. The TruFLOW Jr. Valveless Manifold does not feature flow balancing or isolation capability. Manifolds are available in 2-, 3- and 4-loop configurations. The manifold body ends have R32 unions and the loop outlets have R20 male threads.

| Part name | Part no. | C [inch] | Weight per UOM [lbs/UOM] |
|-------------------------------|----------|----------|--------------------------|
| TruFLOW Jr. Valveless, 2-loop | A2663202 | - | 2.1 |
| TruFLOW Jr. Valveless, 3-loop | A2663203 | - | 2.8 |
| TruFLOW Jr. Valveless, 4-loop | A2663204 | 2.3 | 3.4 |

| Part name | Part no. | Codes | Standards | Listings |
|---------------------------------|----------|---------------------------|---|------------|
| TruFLOW Jr. valveless manifolds | All | IMC IRC NBC of Canada UMC | CSA B137.5 R32: ISO 228-G 1 1/4" ASTM F877 R20: ISO 228-G 3/4" | cNSFus-rfh |

Installation

Refer to the TruFLOW Jr. Manifold Instruction Sheet or the Uponor Complete Design Assistance Manual for additional information.

Related applications

- Radiant Heating and Cooling Systems
- Permafrost Prevention Systems
- Turf Conditioning Systems

Notes

Manifold body threaded connections:
R32
Manifold loop threaded connections: R20

Footnotes

Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517