

ProPEX EP 45 elbows

Project information

Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:


Technical data

Material	Engineered Polymer
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar)
	180 °F (82 °C) at 100 psi (6.9 bar)
	200 °F (93 °C) at 80 psi (5.5 bar)

Product information and application use

ProPEX® engineered polymer (EP) elbows make 45-degree connections for Uponor crosslinked polyethylene (PEX-a) tubing for use in hot and cold domestic potable water systems, residential fire safety and hydronic radiant heating and cooling systems. Each end of the elbow is manufactured with an Uponor ProPEX fitting for connections to Uponor AquaPEX® or Wirsbo hePEX™ tubing.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

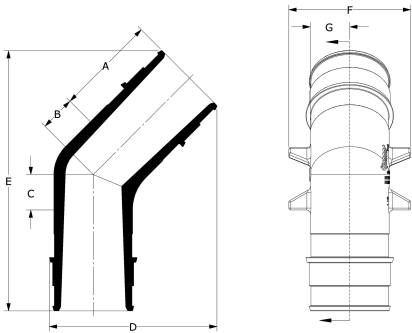

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	Cv	Equivalent length through [ft]	End Type 1
ProPEX EP 45 Elbow, 1" PEX x 1" PEX	Q4761010	1.191	0.6	0.6	2.171	3.406	1.48	0.494	19.1	3.46	ProPEX 1"
ProPEX EP 45 Elbow, 1 1/4" PEX x 1 1/4" PEX	Q4761313	1.455	0.6	0.6	2.566	3.941	1.82	0.613	29.7	3.2	ProPEX 1-1/4"
ProPEX EP 45 Elbow, 1 1/2" PEX x 1 1/2" PEX	Q4761515	1.714	0.6	0.6	2.851	4.418	2.07	0.67	33.1	9.3	ProPEX 1-1/2"
ProPEX EP 45 Elbow, 2" PEX x 2" PEX	Q4762020	2.157	0.75	0.75	3.767	5.634	2.82	0.941	68.9	8.8	ProPEX 2"
ProPEX EP 45 Elbow, 2 1/2" PEX x 2 1/2" PEX	Q4762525	2.83	1	1	4.813	7.353	3.6	1.21	136.8	7	ProPEX 2-1/2"
ProPEX EP 45 Elbow, 3" PEX x 3" PEX	Q4763030	3.38	1.1	1.1	5.68	8.623	4.2	1.45	195.5	8.3	ProPEX 3"

Part name	Part no.	End Type 2	Weight per UOM [lbs/UOM]
ProPEX EP 45 Elbow, 1" PEX x 1" PEX	Q4761010	ProPEX 1"	0.06
ProPEX EP 45 Elbow, 1 1/4" PEX x 1 1/4" PEX	Q4761313	ProPEX 1-1/4"	0.1
ProPEX EP 45 Elbow, 1 1/2" PEX x 1 1/2" PEX	Q4761515	ProPEX 1-1/2"	0.13
ProPEX EP 45 Elbow, 2" PEX x 2" PEX	Q4762020	ProPEX 2"	0.32
ProPEX EP 45 Elbow, 2 1/2" PEX x 2 1/2" PEX	Q4762525	ProPEX 2-1/2"	0.65
ProPEX EP 45 Elbow, 3" PEX x 3" PEX	Q4763030	ProPEX 3"	1.07

Part name	Part no.	Codes	Standards	Listings
ProPEX EP 45 elbows	All	IMC UPC IBC IRC IPC NPC of Canada UMC NSPC	ASTM F1960 ASTM E119/UL 263 ASTM E84 ASTM E814/ULC S115 ASTM F877 CSA B137.5 ULC S102.2 ULC S101	IAPMO-ES ICC-ES-PMG cNSFus-pw UL U.P.Code cQA us P321 HUD MR 1269
In addition, the following parts have additional codes, standards, or listings:				
ProPEX EP 45 Elbow, 1" PEX x 1" PEX	Q4761010		NSF-61 NSF-14	
ProPEX EP 45 Elbow, 1 1/4" PEX x 1 1/4" PEX	Q4761313		NSF-61 NSF-14	
ProPEX EP 45 Elbow, 1 1/2" PEX x 1 1/2" PEX	Q4761515		NSF/ANSI/CAN 61 NSF/ANSI 14	
ProPEX EP 45 Elbow, 2" PEX x 2" PEX	Q4762020		NSF/ANSI/CAN 61 NSF/ANSI 14	
ProPEX EP 45 Elbow, 2 1/2" PEX x 2 1/2" PEX	Q4762525		NSF-61 NSF-14	
ProPEX EP 45 Elbow, 3" PEX x 3" PEX	Q4763030		NSF-61 NSF-14	
Installation		Related applications		
Use the appropriate ProPEX ring for PEX-a tubing. Refer to the Uponor PEX Piping Systems Design and Installation Manual for additional information.		PEX-a Plumbing Systems		
		Hydronic Radiant Heating and Cooling Systems		
		Turf Conditioning Systems		
		Permafrost Prevention Systems		
		AquaSAFE™ Fire Safety Systems		
Footnotes		Contact information		
-		<div> <div> Uponor Inc.  5925 148th Street West  Apple Valley, MN 55124  T 800.321.4739  F 952.891.2008 </div> <div> Uponor Ltd.  6510 Kennedy Road  Mississauga, ON L5T 2X4  T 888.594.7726  F 800.638.9517 </div> </div>		