
ProPEX lead-free (LF) brass ice maker valves (straight)

Project information

Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

Technical data

Material	LF Brass
End type 1	ProPEX 1/2"
End type 2	Compression 1/4"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

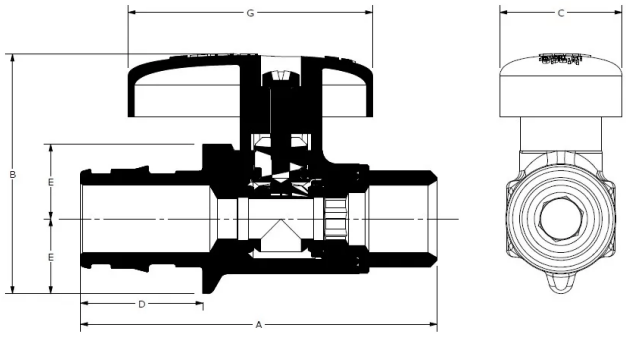

Product information and application use

Uponor ProPEX® Lead-free (LF) Brass Ice Maker Valve connects ½" Uponor AquaPEX® tubing to ¼" O.D. compression with quarter-turn and shut-off capability.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	Weight per UOM [lbs/UOM]
ProPEX LF Brass Ice Maker Valve, 1/2" PEX x 1/4" O.D. (straight)	LF4786025	2.126	1.492	0.63	0.709	0.433	0.433	1.181	0.17

Part name	Part no.	Codes	Standards	Listings
ProPEX lead-free (LF) brass ice maker valves (straight)	LF4786025	UPC|IPC|NPC of Canada|NSPC	ASTM F1960|CSA B125|CSA B137.5|NSF/ANSI/CAN 61|ASME A112.18.1|NSF/ANSI/CAN 372|ASTM F877	cCSAus

Installation

Install valves according to local building code. Do not dismantle. Refer to the Uponor Professional Plumbing Installation Guide for additional information.

Related applications

PEX-a Plumbing Systems

Footnotes

-

Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517

© 2026 Uponor North America. All Rights Reserved