Smatrix Pulse expansion modules

Project information


Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

Technical data

Operating temperature min. [°F]	32 °f
Operating temperature max. [°F]	113 °f
Ambient temperature min. [F]	-4 °f
Ambient temperature max. [F]	158 °f
Ambient humidity non-condensing max [%]	85
Prop 65 label required?	Yes

Product information and application use

The Smatrix Pulse Expansion Module (M-262) increases the Smatrix Pulse Controller (X-265) capacity with six (6) additional thermostats along with six (6) more actuators. The Expansion Module operates the actuators, which, in turn, affect the flow of the supply water to change the indoor temperature using information transmitted from registered thermostats and system parameters.

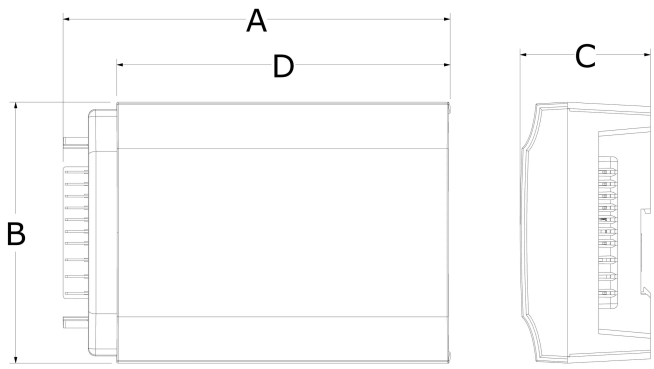

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	Operating voltage AC [VAC]	Weight per UOM [lbs/UOM]
Smatrix Pulse Expansion Module (M-262)	A3801262	6.417	4.331	2.165	5.551	115	0.61

Installation

Refer to the Smatrix Pulse Installation and Operation Manual for installation information.

Related applications

Radiant

Hydronic Heating & Cooling

Tools & Accessories

Footnotes

-

Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517

© 2026 Uponor North America. All Rights Reserved