# ChlorFIT Fitting Coupling Reducing

## Project information

| | |
|---|---|
| Job name: | Location: |
| Engineer: | Date submitted: |
| Contractor: | Submitted by: |
| Manufacturer's representative: | Approved by: |


## Technical data

Material CPVC

## Product information and application use

Use Uponor ChlorFIT® Schedule 80 Corzan® CPVC Couplings in hot and cold potable-water systems as well as hydronic heating and cooling applications.

*Corzan® is a registered trademark of Lubrizol Advanced Materials, Inc.*

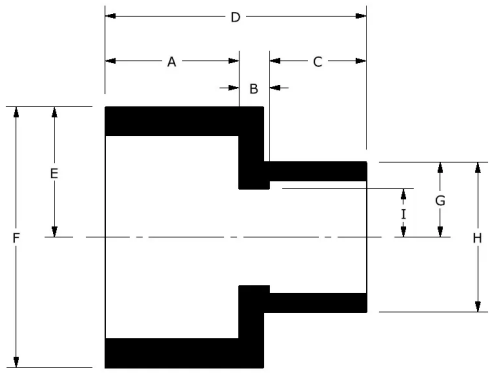


| Part name | Part no. | A [inch] | B [inch] | C [inch] | D [inch] | E [inch] | F [inch] | G [inch] | H [inch] | I [inch] | End Type 1 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 3/4" x 1/2" CPVC 80 Reducing Coupling (SxS) | 9829101 | 1.047 | 0.11 | 0.922 | 2.079 | 0.755 | 1.51 | 0.64 | 1.28 | 0.28 | Socket 3/4" |
| 1" x 1/2" CPVC 80 Reducing Coupling (SxS) | 9829130 | 1.188 | 0.1 | 0.922 | 2.21 | 0.925 | 1.85 | 0.64 | 1.28 | 0.28 | Socket 1" |
| 1" x 3/4" CPVC 80 Reducing Coupling (SxS) | 9829131 | 1.134 | 0.117 | 1.009 | 2.26 | 0.928 | 1.857 | 0.763 | 1.526 | 0.41 | Socket 1" |
| 1-1/4" x 3/4" CPVC 80 Reducing Coupling (SxS), Bushed | 9829167FB | 1.272 | 0.686 | 1.012 | 2.97 | 1.044 | 2.088 | 1.09 | 2.18 | 0.82 | Socket 1-1/4" |
| 1-1/4" x 1" CPVC 80 Reducing Coupling (SxS), Bushed | 9829168FB | 1.272 | 0.567 | 1.148 | 2.987 | 1.044 | 2.088 | 1.089 | 2.178 | 0.525 | Socket 1-1/4" |
| 1-1/2" x 1/2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829209FB | 1.394 | 0.108 | 1.151 | 2.654 | 1.302 | 2.603 | 0.928 | 1.855 | 0.526 | Socket 1-1/2" |
| 1-1/2" x 3/4" CPVC 80 Reducing Coupling (SxS), Bushed | 9829210FB | 1.394 | 0.52 | 1.022 | 2.937 | 1.302 | 2.603 | 0.928 | 1.855 | 0.411 | Socket 1-1/2" |
| 1-1/2" x 1" CPVC 80 Reducing Coupling (SxS) | 9829211 | 1.438 | 0.124 | 1.188 | 2.75 | 1.25 | 2.5 | 0.925 | 1.85 | 0.525 | Socket 1-1/2" |
| 1-1/2" x 1-1/4" CPVC 80 Reducing Coupling (SxS) | 9829212 | 1.438 | 0.1 | 1.312 | 2.85 | 1.25 | 2.5 | 1.065 | 2.13 | 0.645 | Socket 1-1/2" |
| 2" x 1/2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829247FB | 1.69 | 0.316 | 1.147 | 3.153 | 1.587 | 3.174 | 0.881 | 1.762 | 0.554 | Socket 2" |
| 2" x 3/4" CPVC 80 Reducing Coupling (SxS), Bushed | 9829248FB | 1.69 | 0.316 | 1.147 | 3.153 | 1.587 | 3.174 | 0.881 | 1.762 | 0.554 | Socket 2" |
| 2" x 1" CPVC 80 Reducing Coupling (SxS) | 9829249 | 1.562 | 0.355 | 1.133 | 3.05 | 1.52 | 3.04 | 0.875 | 1.75 | 0.565 | Socket 2" |
| 2" x 1-1/4" CPVC 80 Reducing Coupling (SxS) | 9829250 | 1.562 | 0.126 | 1.312 | 3 | 1.52 | 3.04 | 1.065 | 2.13 | 0.75 | Socket 2" |
| 2" x 1-1/2" CPVC 80 Reducing Coupling (SxS) | 9829251 | 1.562 | 0.107 | 1.381 | 3.05 | 1.52 | 3.04 | 1.252 | 2.504 | 0.76 | Socket 2" |
| 2-1/2" x 1/2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829287FB | 1.822 | 0.918 | 0.903 | 3.643 | 1.813 | 3.627 | 1.195 | 2.39 | 0.307 | Socket 2-1/2" |
| 2-1/2" x 3/4" CPVC 80 Reducing Coupling (SxS), Bushed | 9829288FB | 1.822 | 0.814 | 1.007 | 3.643 | 1.813 | 3.627 | 1.23 | 2.459 | 0.411 | Socket 2-1/2" |
| 2-1/2" x 1" CPVC 80 Reducing Coupling (SxS), Bushed | 9829289FB | 1.759 | 0.687 | 1.141 | 3.586 | 1.81 | 3.62 | 1.063 | 2.125 | 0.52 | Socket 2-1/2" |
| 2-1/2" x 1-1/4" CPVC 80 Reducing Coupling (SxS), Bushed | 9829290FB | 1.822 | 0.589 | 1.272 | 3.683 | 1.813 | 3.627 | 1.23 | 2.459 | 0.687 | Socket 2-1/2" |
| 2-1/2" x 1-1/2" CPVC 80 Reducing Coupling (SxS) | 9829291 | 1.759 | 0.14 | 1.381 | 3.28 | 1.75 | 3.5 | 1.19 | 2.38 | 0.875 | Socket 2-1/2" |
| 2-1/2" x 2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829292FB | 1.789 | 0.649 | 1.63 | 4.067 | 1.744 | 3.488 | 1.772 | 3.545 | 1.03 | Socket |

© 2026 Uponor North America. All Rights Reserved

| | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | | 2-1/2" |
| | 3" x 1" CPVC 80 Reducing Coupling (SxS), Bushed | 9829335FB | 1.933 | 0.85 | 1.143 | 3.926 | 2.267 | 4.533 | 1.52 | 3.039 | 0.524 | Socket 3" |
| | 3" x 1-1/2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829337FB | 1.893 | 1.173 | 1.501 | 4.567 | 2.096 | 4.192 | 1.981 | 3.963 | 0.815 | Socket 3" |
| | 3" x 2" CPVC 80 Reducing Coupling (SxS) | 9829338 | 1.945 | 0.165 | 1.5 | 3.61 | 2.196 | 4.391 | 1.515 | 3.03 | 0.98 | Socket 3" |
| | 3" x 2-1/2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829339FB | 1.893 | 0.678 | 1.843 | 4.413 | 2.096 | 4.192 | 1.981 | 3.963 | 1.2 | Socket 3" |
| | 4" x 1" CPVC 80 Reducing Coupling (SxS), Bushed | 9829417FB | 2.304 | 1.487 | 1.141 | 4.932 | 2.828 | 5.655 | 2.208 | 4.416 | 0.52 | Socket 4" |
| | 4" x 1-1/2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829419FB | 2.304 | 1.103 | 1.542 | 4.949 | 2.828 | 5.655 | 2.208 | 4.416 | 0.761 | Socket 4" |
| | 4" x 2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829420FB | 2.304 | 0.217 | 1.861 | 4.382 | 2.828 | 5.655 | 2.208 | 4.416 | 1.454 | Socket 4" |
| | 4" x 2-1/2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829421FB | 2.304 | 0.593 | 1.894 | 4.791 | 2.828 | 5.655 | 2.208 | 4.416 | 1.225 | Socket 4" |
| | 4" x 3" CPVC 80 Reducing Coupling (SxS) | 9829422 | 2.253 | 0.254 | 1.883 | 4.39 | 2.763 | 5.527 | 2.204 | 4.407 | 1.46 | Socket 4" |
| | 6" x 1-1/2" CPVC 80 Reducing Coupling (SxS), Bushed, 3 Step | 9829527FB | 3.04 | 2.937 | 1.486 | 7.463 | 3.78 | 7.56 | 1.981 | 3.963 | 0.815 | Socket 6" |
| | 6" x 2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829528FB | 4.456 | 4.602 | 1.562 | 10.62 | 3.959 | 7.919 | 2.755 | 5.51 | 1 | Socket 6" |
| | 6" x 2-1/2" CPVC 80 Reducing Coupling (SxS), Bushed, 2 Step | 9829529FB | 3.04 | 2.442 | 1.843 | 7.325 | 3.78 | 7.56 | 1.845 | 3.69 | 1.2 | Socket 6" |
| ✔ | 6" x 3" CPVC 80 Reducing Coupling (SxS), Bushed | 9829530FB | 4.456 | 4.23 | 1.966 | 10.652 | 3.959 | 7.919 | 2.813 | 5.626 | 1.654 | Socket 6" |
| | 6" x 4" CPVC 80 Reducing Coupling (SxS) | 9829532 | 4.456 | 3.456 | 2.26 | 10.172 | 3.959 | 7.919 | 2.755 | 5.51 | 1.943 | Socket 6" |
| | 8" x 4" CPVC 80 Reducing Coupling (SxS), Bushed | 9829582FB | 4.033 | 2.107 | 3.037 | 9.176 | 4.9 | 9.8 | 3.903 | 7.806 | 3.074 | Socket 8" |
| | 8" x 6" CPVC 80 Reducing Coupling (SxS) | 9829585 | 4.033 | 2.107 | 3.037 | 9.176 | 4.9 | 9.8 | 3.903 | 7.806 | 3.074 | Socket 8" |

| Part name | Part no. | End Type 2 | Operating Temperature 1 [°F] | Operating Temperature 2 [°F] | Weight per UOM [lbs/UOM] |
|---|---|---|---|---|---|
| 3/4" x 1/2" CPVC 80 Reducing Coupling (SxS) | 9829101 | Socket 1/2" | 73 °F (23 °C) at 690 psi (23 °C) | 180 °F (82 °C) at 170 psi (82 °C) | 0.1 |
| 1" x 1/2" CPVC 80 Reducing Coupling (SxS) | 9829130 | Socket 1/2" | 73 °F (23 °C) at 630 psi (23 °C) | 180 °F (82 °C) at 155 psi (82 °C) | 0.14 |
| 1" x 3/4" CPVC 80 Reducing Coupling (SxS) | 9829131 | Socket 3/4" | 73 °F (23 °C) at 630 psi (23 °C) | 180 °F (82 °C) at 155 psi (82 °C) | 0.15 |
| 1-1/4" x 3/4" CPVC 80 Reducing Coupling (SxS), Bushed | 9829167FB | Socket 3/4" | 73 °F (23 °C) at 520 psi (23 °C) | 180 °F (82 °C) at 130 psi (82 °C) | 0.18 |
| 1-1/4" x 1" CPVC 80 Reducing Coupling (SxS), Bushed | 9829168FB | Socket 1" | 73 °F (23 °C) at 520 psi (23 °C) | 180 °F (82 °C) at 130 psi (82 °C) | 0.37 |
| 1-1/2" x 1/2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829209FB | Socket 1/2" | 73 °F (23 °C) at 470 psi (23 °C) | 180 °F (82 °C) at 115 psi (82 °C) | 0.23 |
| 1-1/2" x 3/4" CPVC 80 Reducing Coupling (SxS), Bushed | 9829210FB | Socket 3/4" | 73 °F (23 °C) at 470 psi (23 °C) | 180 °F (82 °C) at 115 psi (82 °C) | 0.94 |
| 1-1/2" x 1" CPVC 80 Reducing Coupling (SxS) | 9829211 | Socket 1" | 73 °F (23 °C) at 470 psi (23 °C) | 180 °F (82 °C) at 115 psi (82 °C) | 0.29 |
| 1-1/2" x 1-1/4" CPVC 80 Reducing Coupling (SxS) | 9829212 | Socket 1-1/4" | 73 °F (23 °C) at 470 psi (23 °C) | 180 °F (82 °C) at 115 psi (82 °C) | 0.29 |
| 2" x 1/2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829247FB | Socket 1/2" | 73 °F (23 °C) at 400 psi (23 °C) | 180 °F (82 °C) at 100 psi (82 °C) | 0.3 |
| 2" x 3/4" CPVC 80 Reducing Coupling (SxS), Bushed | 9829248FB | Socket 3/4" | 73 °F (23 °C) at 400 psi (23 °C) | 180 °F (82 °C) at 100 psi (82 °C) | 0.61 |
| 2" x 1" CPVC 80 Reducing Coupling (SxS) | 9829249 | Socket 1" | 73 °F (23 °C) at 400 psi (23 °C) | 180 °F (82 °C) at 100 psi (82 °C) | 0.62 |
| 2" x 1-1/4" CPVC 80 Reducing Coupling (SxS) | 9829250 | Socket 1-1/4" | 73 °F (23 °C) at 400 psi (23 °C) | 180 °F (82 °C) at 100 psi (82 °C) | 0.71 |
| 2" x 1-1/2" CPVC 80 Reducing Coupling (SxS) | 9829251 | Socket 1-1/2" | 73 °F (23 °C) at 400 psi (23 °C) | 180 °F (82 °C) at 100 psi (82 °C) | 0.71 |
| 2-1/2" x 1/2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829287FB | Socket 1/2" | 73 °F (23 °C) at 420 psi (23 °C) | 180 °F (82 °C) at 105 psi (82 °C) | 0.66 |
| 2-1/2" x 3/4" CPVC 80 Reducing Coupling (SxS), Bushed | 9829288FB | Socket 3/4" | 73 °F (23 °C) at 420 psi (23 °C) | 180 °F (82 °C) at 105 psi (82 °C) | 0.67 |

© 2026 Uponor North America. All Rights Reserved

| | | | | | | |
|---|---|---|---|---|---|---|
| | 2-1/2" x 1" CPVC 80 Reducing Coupling (SxS), Bushed | 9829289FB | Socket 1" | 73 °F (23 °C) at 420 psi (23 °C) | 180 °F (82 °C) at 105 psi (82 °C) | 0.64 |
| | 2-1/2" x 1-1/4" CPVC 80 Reducing Coupling (SxS), Bushed | 9829290FB | Socket 1-1/4" | 73 °F (23 °C) at 420 psi (23 °C) | 180 °F (82 °C) at 105 psi (82 °C) | 0.59 |
| | 2-1/2" x 1-1/2" CPVC 80 Reducing Coupling (SxS) | 9829291 | Socket 1-1/2" | 73 °F (23 °C) at 420 psi (23 °C) | 180 °F (82 °C) at 105 psi (82 °C) | 0.8 |
| | 2-1/2" x 2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829292FB | Socket 2" | 73 °F (23 °C) at 420 psi (23 °C) | 180 °F (82 °C) at 105 psi (82 °C) | 1.2 |
| | 3" x 1" CPVC 80 Reducing Coupling (SxS), Bushed | 9829335FB | Socket 1" | 73 °F (23 °C) at 370 psi (23 °C) | 180 °F (82 °C) at 90 psi (82 °C) | 0.7 |
| | 3" x 1-1/2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829337FB | Socket 1-1/2" | 73 °F (23 °C) at 370 psi (23 °C) | 180 °F (82 °C) at 90 psi (82 °C) | 0.93 |
| | 3" x 2" CPVC 80 Reducing Coupling (SxS) | 9829338 | Socket 2" | 73 °F (23 °C) at 370 psi (23 °C) | 180 °F (82 °C) at 90 psi (82 °C) | 1 |
| | 3" x 2-1/2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829339FB | Socket 2-1/2" | 73 °F (23 °C) at 370 psi (23 °C) | 180 °F (82 °C) at 90 psi (82 °C) | 1.56 |
| | 4" x 1" CPVC 80 Reducing Coupling (SxS), Bushed | 9829417FB | Socket 1" | 73 °F (23 °C) at 320 psi (23 °C) | 180 °F (82 °C) at 80 psi (82 °C) | 2.43 |
| | 4" x 1-1/2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829419FB | Socket 1-1/2" | 73 °F (23 °C) at 320 psi (23 °C) | 180 °F (82 °C) at 80 psi (82 °C) | 2.56 |
| | 4" x 2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829420FB | Socket 2" | 73 °F (23 °C) at 320 psi (23 °C) | 180 °F (82 °C) at 80 psi (82 °C) | 2.61 |
| | 4" x 2-1/2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829421FB | Socket 2-1/2" | 73 °F (23 °C) at 320 psi (23 °C) | 180 °F (82 °C) at 80 psi (82 °C) | 2.33 |
| | 4" x 3" CPVC 80 Reducing Coupling (SxS) | 9829422 | Socket 3" | 73 °F (23 °C) at 320 psi (23 °C) | 180 °F (82 °C) at 80 psi (82 °C) | 1.82 |
| | 6" x 1-1/2" CPVC 80 Reducing Coupling (SxS), Bushed, 3 Step | 9829527FB | Socket 1-1/2" | 73 °F (23 °C) at 280 psi (23 °C) | 180 °F (82 °C) at 70 psi (82 °C) | 8.23 |
| | 6" x 2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829528FB | Socket 2" | 73 °F (23 °C) at 280 psi (23 °C) | 180 °F (82 °C) at 70 psi (82 °C) | 2.09 |
| | 6" x 2-1/2" CPVC 80 Reducing Coupling (SxS), Bushed, 2 Step | 9829529FB | Socket 2-1/2" | 73 °F (23 °C) at 280 psi (23 °C) | 180 °F (82 °C) at 70 psi (82 °C) | 8.23 |
| ✔ | 6" x 3" CPVC 80 Reducing Coupling (SxS), Bushed | 9829530FB | Socket 3" | 73 °F (23 °C) at 280 psi (23 °C) | 180 °F (82 °C) at 70 psi (82 °C) | 8.23 |
| | 6" x 4" CPVC 80 Reducing Coupling (SxS) | 9829532 | Socket 4" | 73 °F (23 °C) at 280 psi (23 °C) | 180 °F (82 °C) at 70 psi (82 °C) | 7.3 |
| | 8" x 4" CPVC 80 Reducing Coupling (SxS), Bushed | 9829582FB | Socket 4" | 73 °F (23 °C) at 250 psi (23 °C) | 180 °F (82 °C) at 60 psi (82 °C) | 13.44 |
| | 8" x 6" CPVC 80 Reducing Coupling (SxS) | 9829585 | Socket 6" | 73 °F (23 °C) at 250 psi (23 °C) | 180 °F (82 °C) at 60 psi (82 °C) | 8.23 |

| Part name | Part no. | Codes | Standards | Listings |
|---|---|---|---|---|
| ChlorFIT Fitting Coupling Reducing | All | UPC\|IBC\|IRC\|IPC\|UMC\|NSPC\|IMC | ASTM F439\|NSF/ANSI/CAN 61\|NSF/ANSI 14 | ULC\|NSFpw-G\|U.P.Code |
| In addition, the following parts have additional codes, standards, or listings: | | | | |
| 3/4" x 1/2" CPVC 80 Reducing Coupling (SxS) | 9829101 | | | ICC-ES-PMG |
| 1" x 1/2" CPVC 80 Reducing Coupling (SxS) | 9829130 | | | ICC-ES-PMG |
| 1" x 3/4" CPVC 80 Reducing Coupling (SxS) | 9829131 | | | ICC-ES-PMG |
| 1-1/4" x 3/4" CPVC 80 Reducing Coupling (SxS), Bushed | 9829167FB | | | ICC-ES-PMG |
| 1-1/4" x 1" CPVC 80 Reducing Coupling (SxS), Bushed | 9829168FB | | | ICC-ES-PMG |
| 1-1/2" x 1/2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829209FB | | | ICC-ES-PMG |
| 1-1/2" x 3/4" CPVC 80 Reducing Coupling (SxS), Bushed | 9829210FB | | | ICC-ES-PMG |
| 1-1/2" x 1" CPVC 80 Reducing Coupling (SxS) | 9829211 | | | ICC-ES-PMG |
| 1-1/2" x 1-1/4" CPVC 80 Reducing Coupling (SxS) | 9829212 | | | ICC-ES-PMG |
| 2" x 1/2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829247FB | | | ICC-ES-PMG |
| 2" x 3/4" CPVC 80 Reducing Coupling (SxS), Bushed | 9829248FB | | | ICC-ES-PMG |
| 2" x 1" CPVC 80 Reducing Coupling | 9829249 | | | ICC-ES-PMG |

© 2026 Uponor North America. All Rights Reserved

| | | |
|---|---|---|
| (SxS) | | |
| 2" x 1-1/4" CPVC 80 Reducing Coupling (SxS) | 9829250 | ICC-ES-PMG |
| 2" x 1-1/2" CPVC 80 Reducing Coupling (SxS) | 9829251 | ICC-ES-PMG |
| 2-1/2" x 1/2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829287FB | ICC-ES-PMG |
| 2-1/2" x 3/4" CPVC 80 Reducing Coupling (SxS), Bushed | 9829288FB | ICC-ES-PMG |
| 2-1/2" x 1" CPVC 80 Reducing Coupling (SxS), Bushed | 9829289FB | ICC-ES-PMG |
| 2-1/2" x 1-1/4" CPVC 80 Reducing Coupling (SxS), Bushed | 9829290FB | ICC-ES-PMG |
| 2-1/2" x 1-1/2" CPVC 80 Reducing Coupling (SxS) | 9829291 | ICC-ES-PMG |
| 2-1/2" x 2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829292FB | ICC-ES-PMG |
| 3" x 1" CPVC 80 Reducing Coupling (SxS), Bushed | 9829335FB | ICC-ES-PMG |
| 3" x 1-1/2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829337FB | ICC-ES-PMG |
| 3" x 2" CPVC 80 Reducing Coupling (SxS) | 9829338 | ICC-ES-PMG |
| 3" x 2-1/2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829339FB | ICC-ES-PMG |
| 4" x 1" CPVC 80 Reducing Coupling (SxS), Bushed | 9829417FB | ICC-ES-PMG |
| 4" x 1-1/2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829419FB | ICC-ES-PMG |
| 4" x 2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829420FB | ICC-ES-PMG |
| 4" x 2-1/2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829421FB | ICC-ES-PMG |
| 4" x 3" CPVC 80 Reducing Coupling (SxS) | 9829422 | ICC-ES-PMG |
| 6" x 1-1/2" CPVC 80 Reducing Coupling (SxS), Bushed, 3 Step | 9829527FB | ICC-ES-PMG |
| 6" x 2" CPVC 80 Reducing Coupling (SxS), Bushed | 9829528FB | ICC-ES-PMG |
| 6" x 2-1/2" CPVC 80 Reducing Coupling (SxS), Bushed, 2 Step | 9829529FB | ICC-ES-PMG |
| 6" x 3" CPVC 80 Reducing Coupling (SxS), Bushed | 9829530FB | ICC-ES-PMG |
| 6" x 4" CPVC 80 Reducing Coupling (SxS) | 9829532 | ICC-ES-PMG |

## Installation

Make connections via solvent welding using primer and solvent cement designed specifically for Schedule 80 CPVC pipe and fittings. Refer to the Uponor ChlorFIT Manual or Uponor ChlorFIT Solvent Welding Instruction Sheet for complete details.

## Related applications

Domestic water

Hydronic piping

## Footnotes

-

## Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517

© 2026 Uponor North America. All Rights Reserved