

# ProPEX lead-free (LF) brass angle stop valves

## Project information


Job name :	Location :
Engineer :	Date submitted:
Contractor :	Submitted by:
Manufacturer's representative :	Approved by :

## Technical data

Material	LF Brass
End type 1	ProPEX 1/2"
End type 2	Compression 3/8"
Temp/pressure ratings	194 °F (90 °C) at 145 psi (10 bar)
Prop 65 label required?	Yes

## Product information and application use

Uponor ProPEX® lead-free (LF) brass stop valves are quarter-turn, chromeplated and available in either angle or straight-stop configurations. Made for point-of-use shut-off at the fixture, this stop valve connects 1/2" Uponor AquaPEX® tubing to 3/8" outside diameter (O.D.) risers.

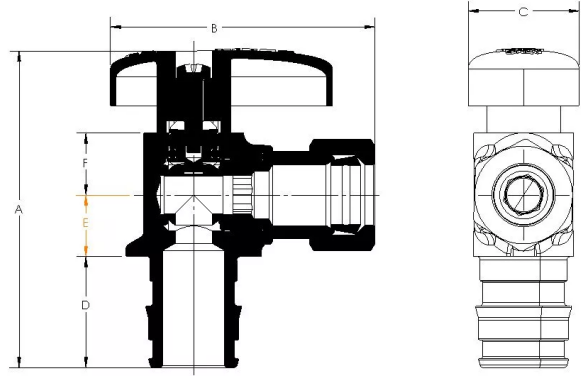

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	Weight per UOM [lbs/UOM]
ProPEX LF Brass Angle Stop Valve, 1/2" PEX	LF4855038	2.035	1.524	0.709	0.709	0.394	0.396	0.16

## Installation

Install this straight or angle stop valve according to your local building code. Do not dismantle. Refer to the AquaPEX Professional Plumbing Installation Guide or Radiant Floor Heating Installation Handbook for additional information.

## Related applications

PEX-a Plumbing Systems

## Codes

UPC|IBC|IRC|IPC|NPC of Canada|UMC|NSPC|IMC

## Standards

NSF-372|ASME A112.18.1|ASTM F877|CSA B125|ASTM F1960|CSA B137.5|NSF-61|NSF-14

## Listings

cNSFus-pw-G|U.P.Code

## Trademark information

ProPEX® is a registered trademark of Uponor Inc. ProPEX™ is a trademark of Uponor Ltd.

## Contact information

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.636.9517