

Uponor PP-RCT cold potable pipes, SDR 11

Project Information


Job name :	Location :
Engineer :	Date submitted:
Contractor :	Submitted by:
Manufacturer's representative :	Approved by :

Technical data

Temp/pressure ratings	73 °F (23 °C) at 252 psi (17.4 bar)
	120 °F (49 °C) at 140 psi (9.7 bar)
	180 °F (82 °C) at 85 psi (5.9 bar)
Prop 65 label required?	No

Product information and application use

Use Uponor PP-RCT cold potable pipe to convey water for cold potable plumbing applications as well as other lower-pressure, lower-temperature applications.

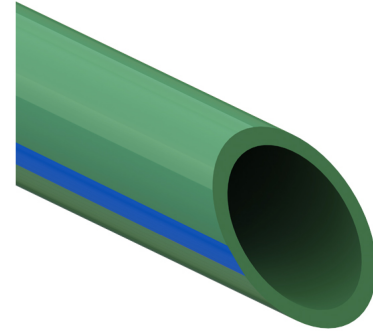

Part name	Part no.	Inner diameter pipe [Inch]	Outer diameter pipe [Inch]	Weight per UOM [lbs/UOM]
1" Uponor PP-RCT Cold Potable Pipe, SDR 11, 13-ft. straight length	PR11221310	1.031	1.26	2.34
1 1/4" Uponor PP-RCT Cold Potable Pipe, SDR 11, 13-ft. straight length	PR11221313	1.283	1.575	3.64
1 1/2" Uponor PP-RCT Cold Potable Pipe, SDR 11, 13-ft. straight length	PR11221315	1.606	1.969	5.59
2" Uponor PP-RCT Cold Potable Pipe, SDR 11, 13-ft. straight length	PR11221320	2.024	2.48	8.84
2 1/2" Uponor PP-RCT Cold Potable Pipe, SDR 11, 19-ft. straight length	PR11221925	2.417	2.953	18.05
3" Uponor PP-RCT Cold Potable Pipe, SDR 11, 19-ft. straight length	PR11221930	2.898	3.543	25.84
4" Uponor PP-RCT Cold Potable Pipe, SDR 11, 19-ft. straight length	PR11221940	4.024	4.921	49.97
6" Uponor PP-RCT Cold Potable Pipe, SDR 11, 19-ft. straight length	PR11221960	5.15	6.299	81.7
8" Uponor PP-RCT Cold Potable Pipe, SDR 11, 19-ft. straight length	PR11221980	6.441	7.874	127.49

Installation

Use approved butt-fusion or socket-fusion connection methods. Refer to the Uponor PP-RCT manual for complete details.

Related applications

Codes

UPC|IRC|IPC|NPC of Canada|UMC|CMC|CPC|IMC

Standards

NSF-61|ASTM E84|ASTM F2389|CSA B137.11

Listings

ICC-ES-PMG 1106|IAPMO-R&T 8358|QAI P321-5|IAPMO K-12775|NSF-51

Footnotes

Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.636.9517