


Colectores de acero inoxidable 'Vario S 1'

Project information

Job name:	Location:
Engineer:	Fecha de envío:
Contractor:	Presentada por:
Manufacturer's representative:	Approved by:

Technical data

Cv	1.17
Material	Stainless Steel
Subcomponent Material	Manifold Components:
	Brass
Manifold size	1 inch
End type 1	FNPT 1"
End type 2	ISO 228-G 3/4"
Temp/pressure ratings	68 °F (20 °C) at 145 psi (10 bar)
	158 °F (70 °C) at 87 psi (6 bar)
	194 °F (90 °C) at 44 psi (3 bar)
Max. fluid flow rate	24 gpm
Prop 65 label required?	Yes

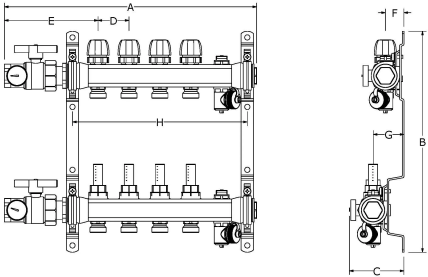

Product information and application use

Los colectores Uponor Vario S de 1" están fabricados con acero inoxidable duradero y resistente a la corrosión, y soportan flujos de hasta 14 galones por minuto (gpm) para aplicaciones de calefacción y refrigeración radiante en residencias y comercios. Los colectores vienen preensamblados y listos para instalar desde el momento en que los sacas de la caja, y cuentan con válvulas de aislamiento, válvulas de equilibrio con medidores de flujo, así como válvulas esféricas de suministro y retorno con rosca NPT de 1" y termómetros.

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	H [inch]	Weight per UOM [lbs/UOM]
Vario S 1" Manifold FM, 2 loops	A3700200	11.177	14.055	3.512	1.969	4.976	1.181	1.969	7.299	9.2

Installation

Related applications

Consulta la hoja de instrucciones del colector Uponor Vario S de 1" para obtener todos los detalles.

Calefacción y refrigeración radiante

Footnotes

Contact information

-	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517
---	---	---